

reliability
under
pressure

- Needle Valves & Manifolds
- Ball Valves & Manifolds
- Severe Service Valves
- Double Block & Bleed Valves
- Gauge Block Monoflange Valves
- Slimline Primary Isolate Valves
- Double Block & Bleed Root Valves
- Sample Injection Valves



Title	Page
THE MOST UNIQUE NEEDLE VALVE ON THE MARKET TODAY	3
STANDARD SPECIFICATION	4
HAND VALVES	5
HAND VALVES / 22,500 PSI NEEDLE VALVES AND MANIFOLDS (/22.5HP) / CRYOGENIC (/LT200) NEEDLE, BALL & DBB VALVES	6
GAUGE VALVES	7
TWO VALVE MANIFOLDS	8
TWO VALVE MANIFOLDS	9
THREE VALVE MANIFOLDS	10
THREE VALVE MANIFOLDS	11
FIVE VALVE MANIFOLDS	12
MINIATURE NEEDLE VALVES	13
22.5KSI MEDIUM PRESSURE VALVES	14
22.5KSI MEDIUM PRESSURE VALVES	15
22.5KSI MEDIUM PRESSURE VALVES	16
COPLANAR MANIFOLDS	17
HEAD UNIT OPTIONS	18
MANIFOLD ACCESSORIES	19
INSTRUMENT PRODUCTS	20
BALL VALVE SPECIFICATIONS	21
BALL VALVES TO 10,000 PSI	22
BALL VALVE OPTIONS	23
DIVERTER & SELECTOR BALL VALVES	24
BALL VALVE MANIFOLDS	25
AIR HEADERS & LOW PRESSURE BALL VALVES	26
DISTRIBUTION MANIFOLDS	27
HOW TO ORDER NEEDLE VALVES / BALL VALVES	28
HOW TO ORDER DISTRIBUTION MANIFOLDS / AIR HEADERS	29
DOUBLE BLOCK & BLEED VALVE SOLUTIONS	30
DOUBLE BLOCK & BLEED VALVE SOLUTIONS	31
DOUBLE BLOCK & BLEED VALVE SOLUTIONS	32
DOUBLE BLOCK & BLEED VALVE SOLUTIONS	33
D TYPE DOUBLE BLOCK & BLEED	34
F TYPE DOUBLE BLOCK & BLEED	35
N TYPE DOUBLE BLOCK & BLEED	36
DOUBLE BLOCK & BLEED DIMENSION TABLES	37
BOLTED CONSTRUCTION DOUBLE BLOCK & BLEED	38
INSTRUMENT DOUBLE BLOCK & BLEED	39
GAUGE BLOCK MONOFLANGE VALVES	40
SLIMLINE PRIMARY ISOLATE VALVES	41
ROOT VALVES FOR PRIMARY ISOLATION	42
SAMPLING AND INJECTION DOUBLE BLOCK & BLEED VALVES / NOZZLE TECHNICAL INFORMATION	43
HOW TO ORDER DOUBLE BLOCK & BLEED VALVES	44
HOW TO ORDER SLIMLINE / MONOFLANGE VALVES / ROOT VALVES / GAUGE OUTSIDE SCREW AND YOKE VALVES	45
INSTRUMENTATION VALVES INSTALLATION, OPERATION AND SAFETY INSTRUCTIONS	46
DOUBLE BLOCK & BLEED VALVES INSTALLATION, OPERATION AND SAFETY INSTRUCTIONS	47



TEE BAR

316 Stainless Steel for maximum corrosion resistance, fastened to spindle by anti-vibration bolt can be inter-changed with anti-tamper feature or a handwheel with or without our patented locking device.

SEAL

Precision machined, works in conjunction with a dynamic piston ring, giving leak free operation for the life of the product. Seals in alternative materials are available.

PISTON RING

Uniquely offers dynamic adjustment of the packing gland seal in response to pressure change. This feature ensures leak free spindle sealing.

INTERCHANGEABLE TIPS


Non-rotating self-centring, anti-galling spindle tip gives positive bubble-tight shut-off self-centring closure and field inter-changeability of different tip styles is possible.

TRACEABILITY OF MATERIALS

All Oliver products have material traceability and pressure test certificates to BS EN 10204 and controlled by QA procedures approved to ISO 9001. A unique code is stamped on all valve bodies linking them with their material and chemical analysis certificates.

HOUSING

Rugged design with rolled threads in contact with body ensures high factor of safety when valve is at maximum pressure and temperature. Metal to metal, body to bonnet contact coupled with a special secondary seal offers an extremely effective leak free joint.

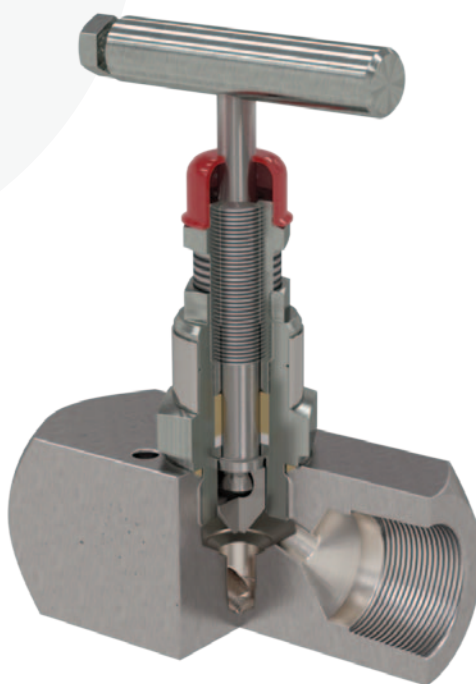

DUST CAP

Protects lubricated spindle threads from the ingress of dirt. Caps are colour coded to show the type of service condition the valve is suitable for – RED (standard) PTFE packed; WHITE degreased for oxygen service; BLACK Graphite packed.

PUSHER & LOCK NUT

These precision machined parts adjust piston ring compression on the packing to give leak free operation, even on vacuum service.

ANTI-BLOWOUT SPINDLE

The heart of our valve. All threads are rolled and lubricated to eliminate galling. A special ten micro inch super finish on the seal diameter dramatically reduces operating torque. And the stem is anti-blowout/non-removable – a major safety feature.


LOCKING PIN

A 316 Stainless Steel pin eliminates unauthorised removal of the bonnet assembly. The pin is held by an anti-vibration spline into the body.


IDENTITY RING

A Stainless Steel ring around the housing indicates in colour coded form the status of the valve: isolate (blue), vent (red) or equalise (green).


STANDARD TIP




METERING TIP



SOFT TIP




HARD TIP



The Oliver Valves non-rotating plug ensures non-rotating linear plug closure eliminating galling.

Threads protected from process media.
Automatic seal pressure adjuster - ensures effective leak free spindle sealing at low and very high pressures.




Dirty media washes thru clearance - no chance of tip rotation.
Plug type open/close tips - no rotary motion on closure, no galling.
Self centring, non-rotating plug closure tip.

These unique features ensure years of trouble free service even under the most adverse process conditions.

Most of the world's instrument valves use a "swaged" ball or tip as shown.

"Non-rotating ball" - can seize to spindle due to fine clearances.
Dirty media stays trapped in causing ball/spindle to gall on closure.




Wear on non-adjustable spindle seals leads to valve leaking in service.
On closure ball develops an indentation, if ball then rotates leakage occurs.

Above problems frequently cause ball to gall with the seat.

Most lower priced valves have these weaknesses. They are not suitable for critical instrumentation applications.

Seal is frequently only an "O" ring.
Rotating spindle gives fast wear on closure.



Threads are in contact with process media and thread lubricant is washed away.

"Live" spindle wears or galls at the tip, giving leakage.





STANDARD SPECIFICATION

(Oliver Valves invites enquiries for special variations on our product lines)

PRESSURE	6,000 PSI (see graph)
TEMPERATURE	240° (see graph)
PACKING	PTFE
THREAD FORM	NPT
MANIFOLD CONN SIZE	1/2"
HANDLE	'T' BAR
SEAT	METAL TO METAL
BORE	0.21" (5.4mm)
CV	0.46

- All direct mount manifolds are supplied with Teflon gaskets and high tensile carbon steel bolts, graphite gaskets and stainless steel bolts are available on request. Add /SSB to part code.
- Manifolds with stainless steel bolts are rated to 4800 PSI. Special high tensile stainless steel bolts can be supplied on request which are rated to 6000 PSI.
- All valves are available to NACE MR-01-75 (Latest revision) for sour service specification (add suffix /NA).

- Manifolds are not supplied with plugs unless specified.
- Manifold valves have stainless steel colour coded identity tags affixed to individual valve head units, blue for isolate, green for equalize and red for vent.
- Products may be degreased for oxygen service to Air Products A03 standard (add suffix /OXY).
- Our 6,000 PSI needle valves and our remote mounted manifolds can be uprated to 10,000 PSI (add suffix /HP).
- Firesafe needle valves and manifolds constructed in austenitic stainless steel and Duplex stainless steel Class 150lb to 2500lb can be supplied. These products have Lloyds Register Approval certificate number 92/00140 (E2) and are to BS 6755 Part 2 (1987) with a maximum working pressure of 6,000 PSI and a maximum working temperature of 540°C (add suffix /FS).
- Standard needle valves, with PTFE packing, have been tested to full vacuum conditions.
- All direct mount manifolds include 7/16" UNF mild steel bolts as standard.

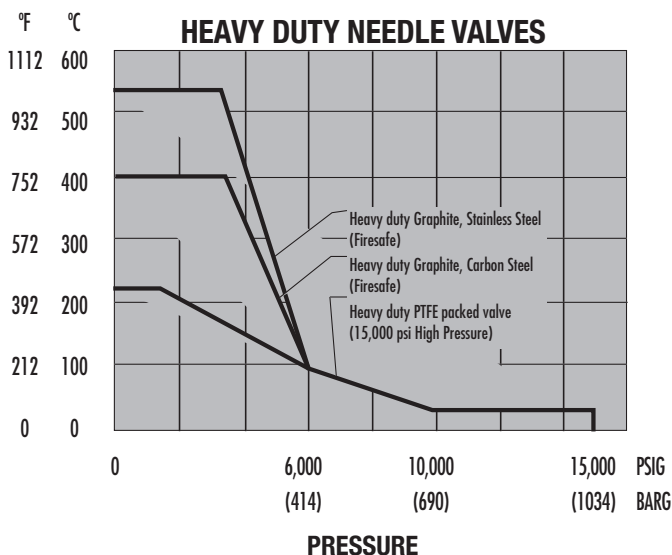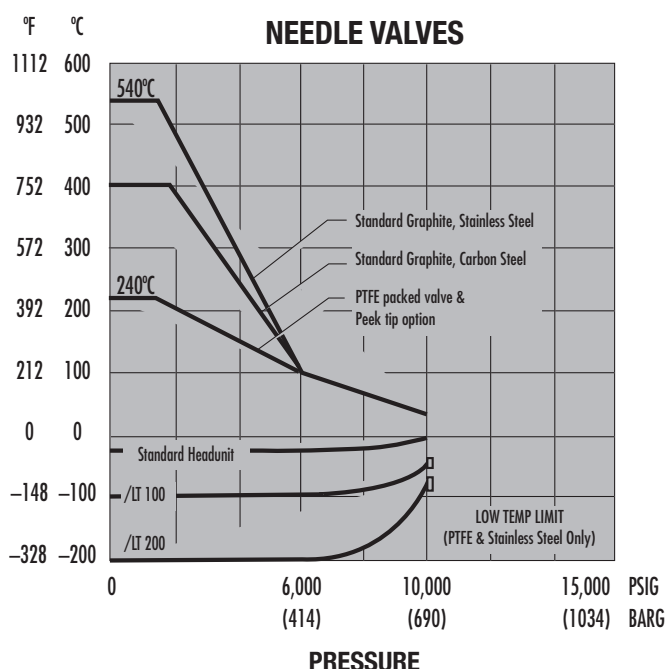

MEETING ISO 15848

Oliver Valves are now able to offer a full range of Needle, Floating Ball and Trunnion Mounted Ball valves, tested in accordance with the International Standard ISO 15848: Industrial Valves - Measurement, Test and Qualification Procedures for Fugitive Emissions.

Due to the requirements of emissions as low as 10^{-6} mg. s⁻¹. m⁻¹ of helium, Oliver Valves have invested a lot of time and effort in the Research and Development of the company, investing heavily in facilities and staff to achieve the required results for the stringent test ISO 15848.



Facilities include purpose built apparatus, including vacuum pumps, mass spectrometers and digital data logging, to perform the required testing to the test method as specified in the standard, along with a thermal chamber capable of achieving temperatures from -70 degrees Celsius to +200 degrees Celsius.



Furthermore all the testing that has been carried performed has been witnessed and certified by Lloyds Register. Certificates are available upon request, contact Oliver Valves sales team for more information.

From the single isolate F50 style needle valve and B6 style ball valves up to the specialist 10mm, 14mm and 20mm bore Trunnion Mounted DBB valves, with pressures up to 2500 class and covering temperature ranges of -46 degrees Celsius to +200 degrees Celsius, Oliver Valves can provide a Fugitive Emissions tested solution. For more information contact Oliver Valves Sales department.




F TYPE



Female x Female configuration.
Standard = 6,000 PSI.
HP = 10,000 PSI.

PART NO	SIZE	A	B	C	WEIGHT (KG)
F25	1/4"	3.6	2.1	1.1	0.5
F38	3/8"	3.6	2.4	1.1	0.5
F50	1/2"	3.6	2.6	1.1	0.5
F75	3/4"	4.0	2.9	1.5	0.8
F10	1"	4.5	3.2	2.0	1.4

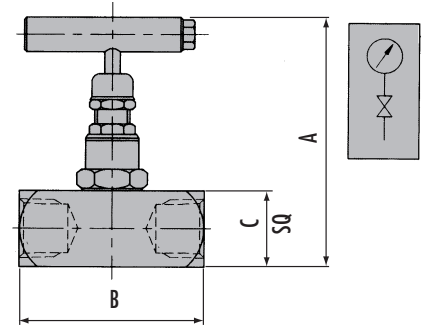


M TYPE



Male x Female configuration.
Standard = 6,000 PSI.
HP = 10,000 PSI.

PART NO	SIZE	A	B	C	WEIGHT (KG)
M25	1/4"	3.6	2.8	1.1	0.5
M38	3/8"	3.6	2.9	1.1	0.5
M50	1/2"	3.6	3.4	1.1	0.5
M75	3/4"	4.0	3.6	1.5	0.8
M10	1"	4.5	3.3	2.0	1.4

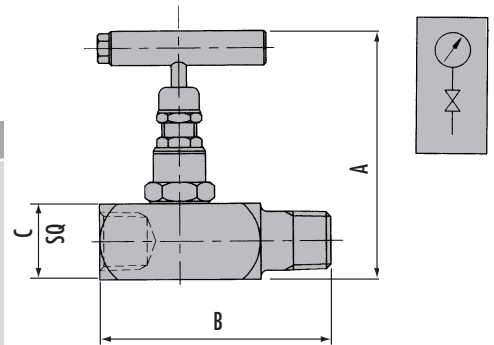


BI TYPE



Twin Ferrule compression fitting 6,000 PSI.
As standard not supplied with nuts and ferrules,
add suffix /NF to include nuts and ferrules as
shown.

PART NO	SIZE	A	B	C	WEIGHT (KG)
BI25	1/4"	3.6	2.4	1.1	0.3
BI38	3/8"	3.6	2.9	1.1	0.4
BI50	1/2"	3.6	3.1	1.1	0.4
BI6mm	6mm	3.6	2.4	1.1	0.3
BI10mm	10mm	3.6	2.9	1.1	0.4
BI12mm	12mm	3.6	3.1	1.1	0.4

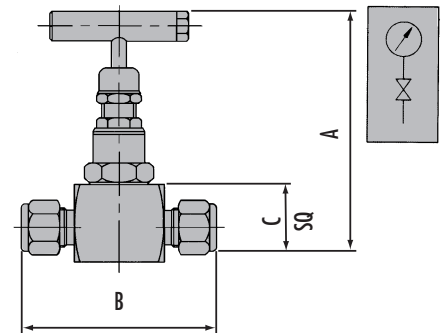


A TYPE



Angle Hand Valves.
Standard 6,000 PSI.
HP = 10,000 PSI.

PART NO	CONNECTION TYPE	SIZE	A	B	C	D	E	WEIGHT (KG)
AF25	Female x Female	1/4"	3.0	1.5	1.1	-	4.0	0.4
AM25	Male x Female	1/4"	3.0	1.5	1.1	4.0	-	0.4
AF50	Female x Female	1/2"	3.0	2.0	1.1	-	4.5	0.5
AM50	Male x Female	1/2"	3.0	2.0	1.1	4.5	-	0.5

C = width

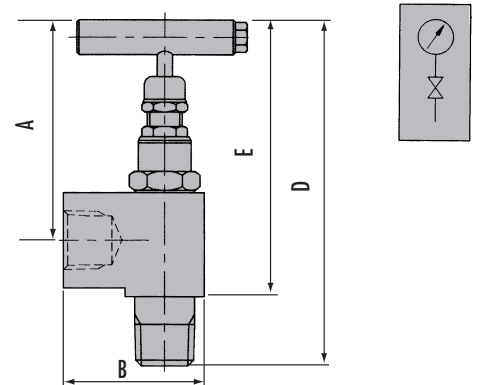

HAND VALVES


HD TYPE HEAVY DUTY NEEDLE VALVE



Male or Female configuration
 HD = 6,000 PSI.
 HD/HP = 10,000 PSI.
 HD/15HP = 15,000 PSI (with cone and threaded ports).

1/4", 3/8" and 1/2" NPT threads rate to 10,000 PSI only.
 3/4", 1" NPT threads rate to 6,000 PSI only.







Above is strictly in accordance to ANSI Standards.

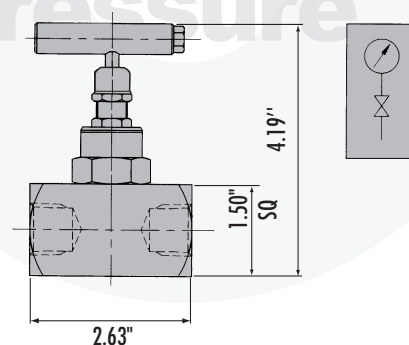

LT200 CRYOGENIC NEEDLE VALVES, BALL VALVES & DBB VALVES

Cryogenic single isolate ball valve
 1/2" NPT Female x Female Thread Orientation.

Max working pressure 3,600 PSI (248.2 BAR).
 Temperature -196°C (-320.8°F) to ambient.
 Fugitive emission qualified to class B.

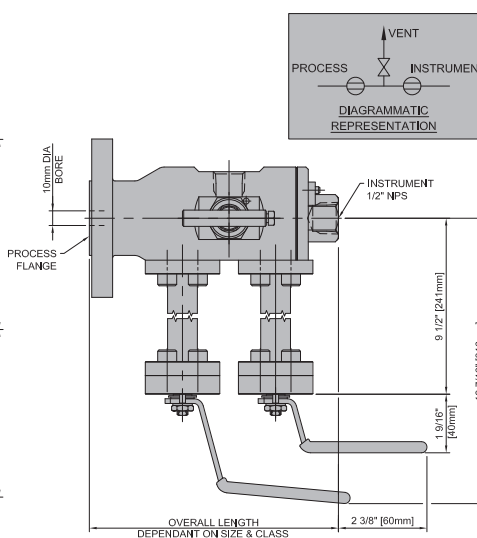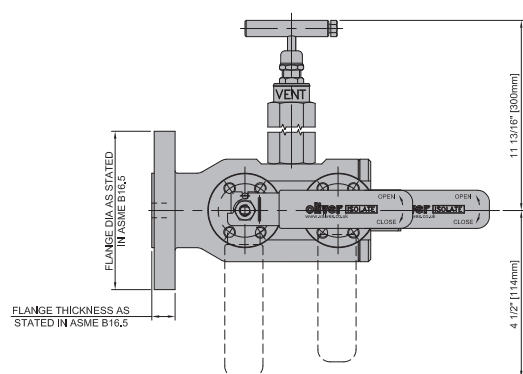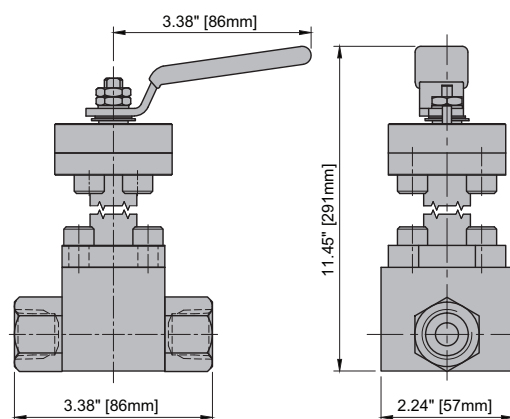
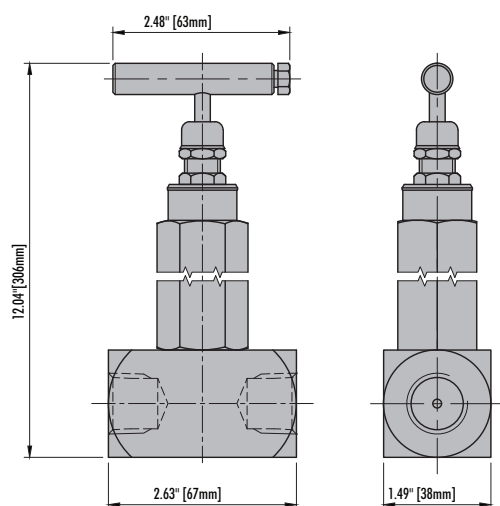


GB1M TYPE



Gauge bleed valve with 1/4" UNF bleed.
Male x Female construction.

Note: Bleed screw supplied as standard.
GBIF (Female x Female construction).





0.5kg

GV1M TYPE



Gauge vent valve with 1/4" NPT bleed.
Male x Female construction.

Note: Vent plug supplied as standard.
GVIF (Female x Female construction).




0.5kg

GM1 TYPE




Gauge multiport valve Male inlet x three
Female outlets.

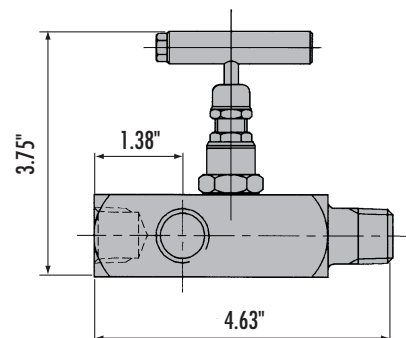



0.7kg

GM1/EXT TYPE

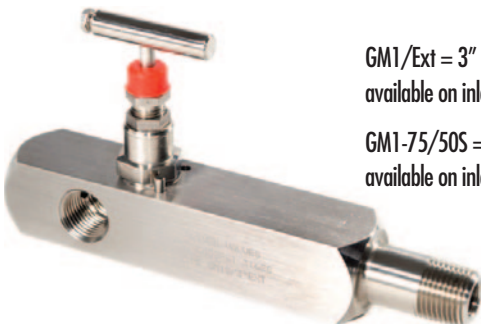

GM1/Ext = 3" lagging extension
available on inlet.

GM1-75/50S = 3/4" connection
available on inlet.

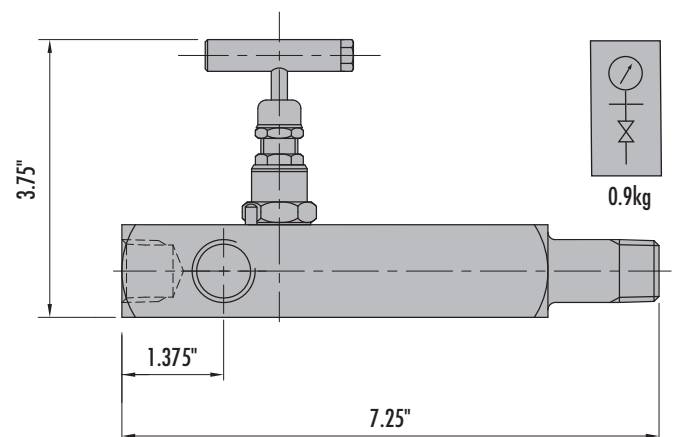



0.9kg



TWO VALVE MANIFOLDS

G12FF TYPE

Two valve manifold Female x Female thread orientation.



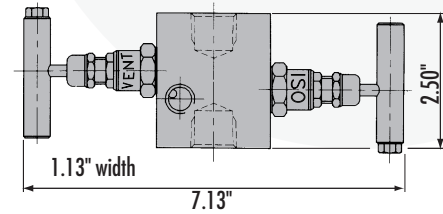


0.9kg

Note: Add suffix /2H for 2 through mounting holes.

G12MF TYPE

Two valve manifold Male x Female thread orientation.

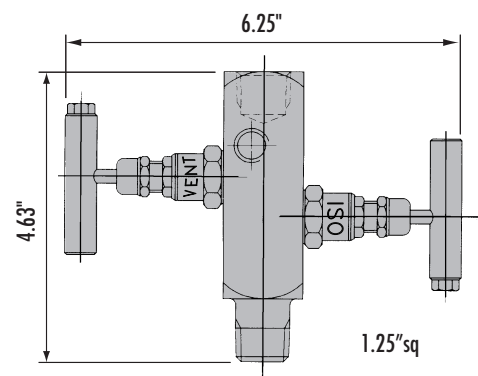
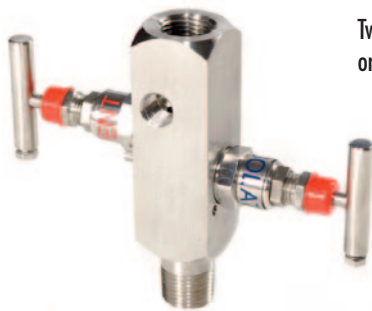


0.9kg

Note: Add suffix /MTG for 2 threaded mounting holes.

G12FM TYPE

Two valve manifold Female x Male thread orientation.

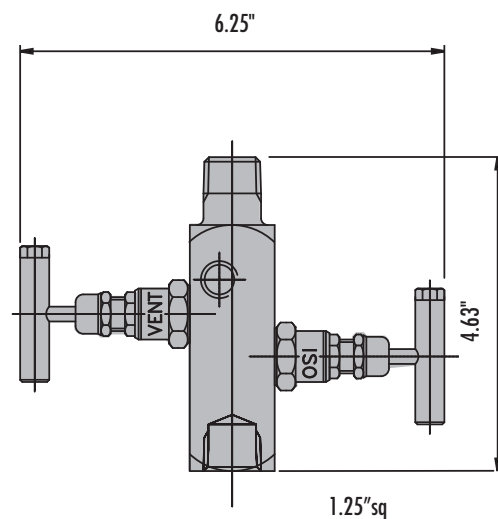



0.9kg



G12AF TYPE



Two valve manifold Female x Female thread orientation, for wall mounting and bottom venting.

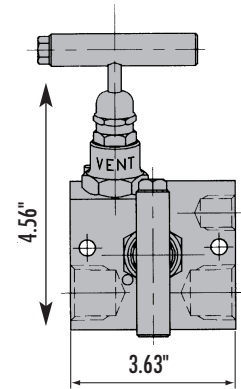

1.0kg



Note: Mounting holes are standard.

Width 1.25"

Y24 TYPE



Direct mounting pipe to flange two valve manifold.

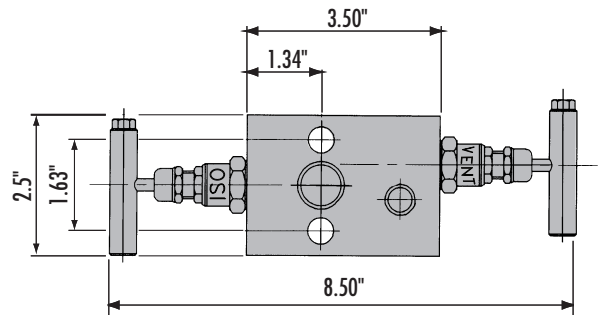



1.4kg

Width 2.50"

Y25 TYPE



Direct mounting flange to flange two valve manifold.

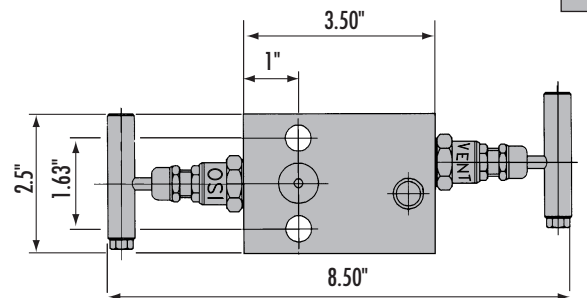

1.4kg

Width 1.25"

Note: Kidney flanges in many styles are optional.





THREE VALVE MANIFOLDS

Y33 TYPE



Remote mounting pipe to pipe.

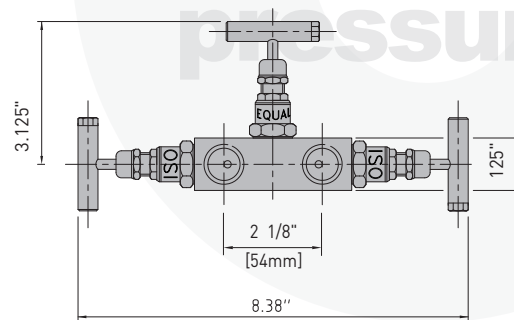



1.5kg

Width 1.25"

YV33 TYPE



Remote mounting pipe to pipe,
with vent ports.

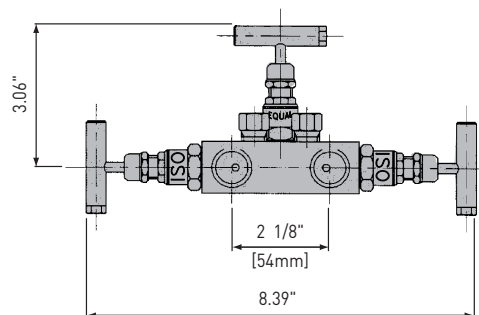



1.5kg

Width 1.25"

Y34 TYPE



Direct mounting pipe to flange.

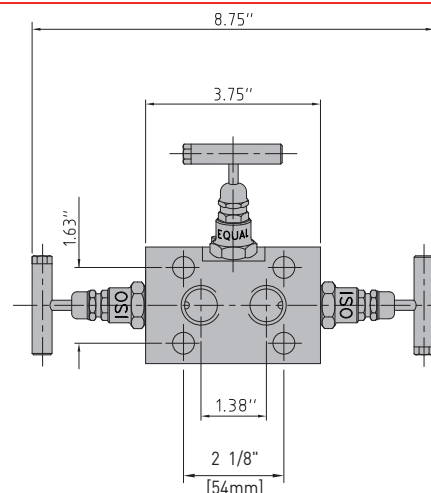



1.5kg

Width 1.25"

YV34 TYPE



Direct mounting pipe to flange,
with vent ports.

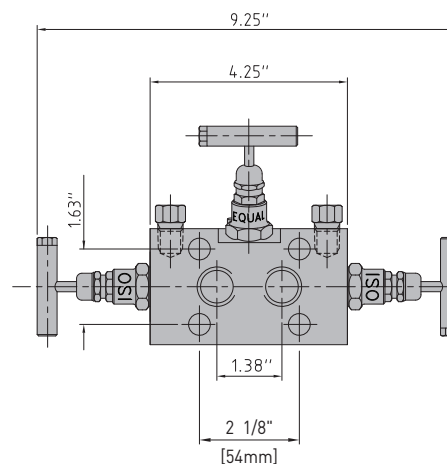



1.5kg

Note: Pressure plugs supplied as standard.
Vent plugs may be supplied by adding suffix /VP.



Y35 TYPE

Direct mounting flange to flange.

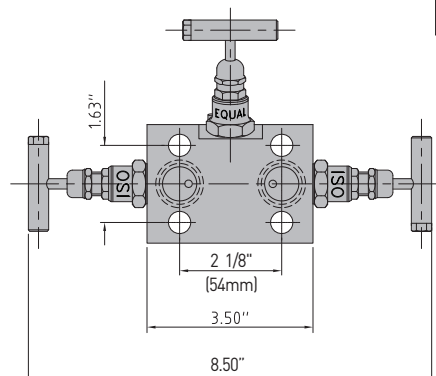



1.5kg

Note: Kidney flanges in many styles are optional.

Width 1.25"

T34 TYPE




Direct mounting pipe to flange.

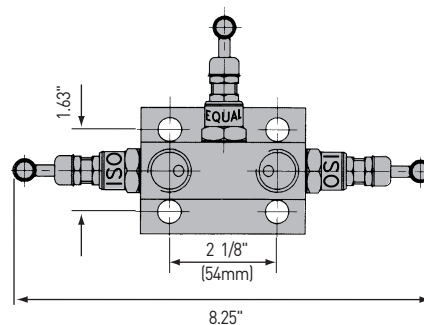

1.5kg

H33 TYPE

Direct mounting flange to flange.

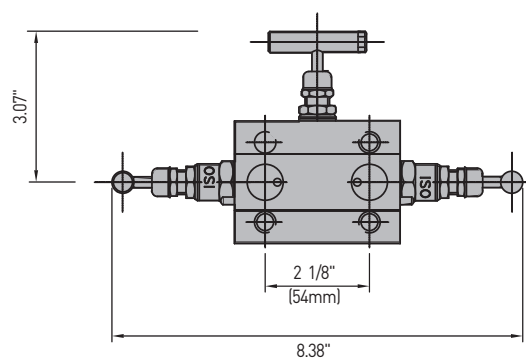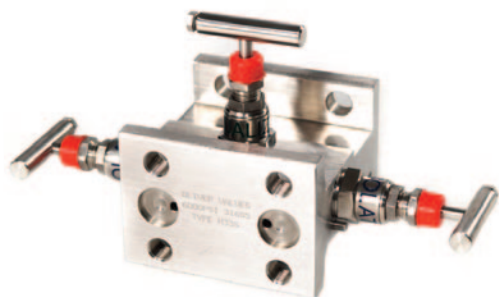

2.0kg

Note: Kidney flanges in many styles are optional.




FIVE VALVE MANIFOLDS


reliability
under
pressure

Y52 TYPE

Direct mounting flange to flange.




2.3kg

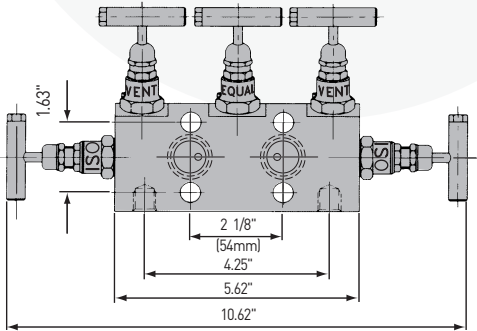


Y53 TYPE

Direct mounting pipe to flange.




2.3kg

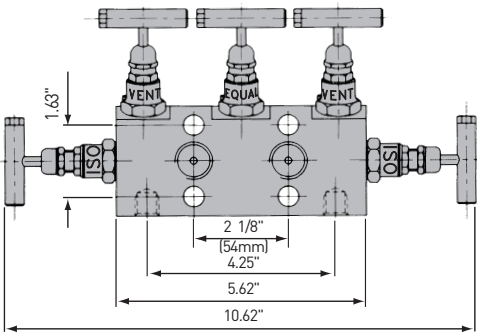


Y54 TYPE

Remote mounting pipe to pipe.



2.3kg

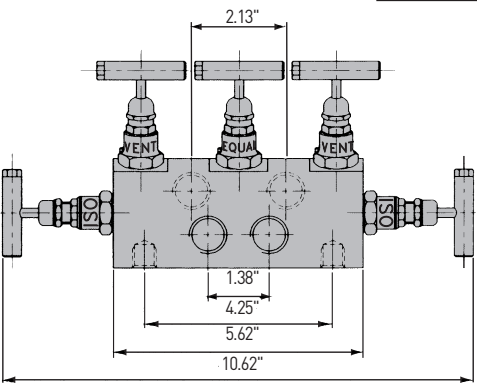

OLIVER VALVES OFFER A RANGE OF MINIATURE NEEDLE VALVES FOR COMPACT INSTALLATION WHERE SPACE AND WEIGHT MAY BE AN ISSUE.




- STD working pressure 6,000 PSI (414 BA/HP option).
- Max working pressure 10,000 PSI (690 Bar) .
- Temperature - 20°C (-29°C) to 350 F (180°C).
- Low operating torque.
- Non Rotating Anti Galling Tip.
- Anti blow out spindle with back seat.
- To Nace MR-01-75 / ISO 15156 compliant.
- Panel Mounting M5 (x two) tapped mounting holes in valve body as standard.
- 316 Stainless steel construction.
- Other materials available on request.

MFF TYPE



Miniature needle valve
1/4" NPT Female x Female Thread Orientation.

PART	'B' LENGTH
MFF25	2.0
MFF50	2.6






MG12AF TYPE



Miniature two valve manifold
NPT Female x Female Thread Orientation.
1/4" Vent only.

PART	'B' LENGTH
MG12AF/25F	2.5
MG12AF/50F	2.8






MDBBINPM/MTG TYPE



Miniature double block and bleed valve manifold
NPT Female x Female Thread Orientation.
1/4" Vent only.

PART
MDBBINPM/25F

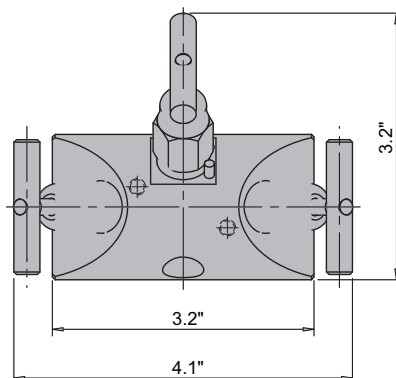

OPTIONS

Connection sizes = Above shown with 1/4" NPT (25) connections, but also available with 1/2" NPT (replace with 50).

Connection Orientation = Above shown with Female x Female thread connections also available in Male x Female connections. (replace F or FF with M or MM).




22.5KSI MEDIUM PRESSURE VALVES

F25S/22.5HP/SF250CX




1. Design pressure 1,551 BAR (22,500PSI)(22.5HP).
2. Temperature rating -50°C (-60°F) to +240°C (+464°F).
3. 4 - 5 Turns from close to open.
4. 2.7mm (0.109") bore.
5. 1/4"MP cone & thread connections. (Gland & collar not supplied with valve).
6. 316 Stainless steel valve body. Other materials available on request.
7. UNS N07718 to ISO15156 spindle tip.
8. Aluminium bronze pusher.
9. Stainless steel T bar.
10. Glass/Moly filled PTFE gland seal.

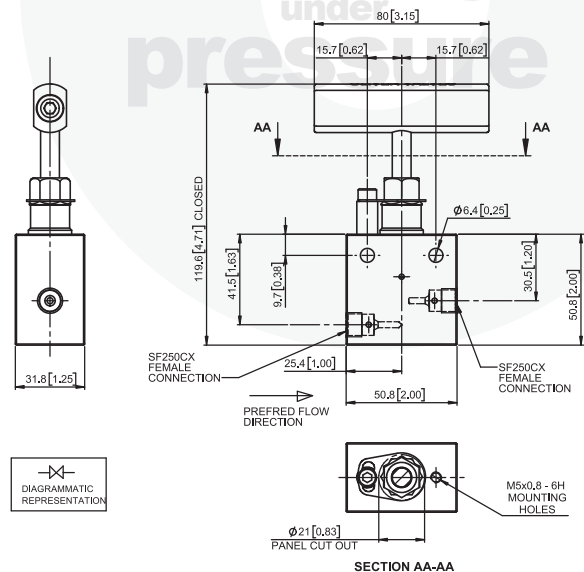

F56S/22.5HP/SF562CX




1. Design pressure 1,551 BAR (22,500PSI)(22.5HP).
2. Temperature rating -50°C (-60°F) to +240°C (+464°F).
3. 4 - 5 Turns from close to open.
4. 8mm (0.312") bore.
5. 9/16"MP cone & thread connections. (Gland & collar not supplied with valve).
6. 316 Stainless steel valve body. Other materials available on request.
7. UNS N07718 to ISO15156 spindle tip.
8. Aluminium bronze pusher.
9. Stainless steel T bar.
10. Glass/Moly filled PTFE gland seal.

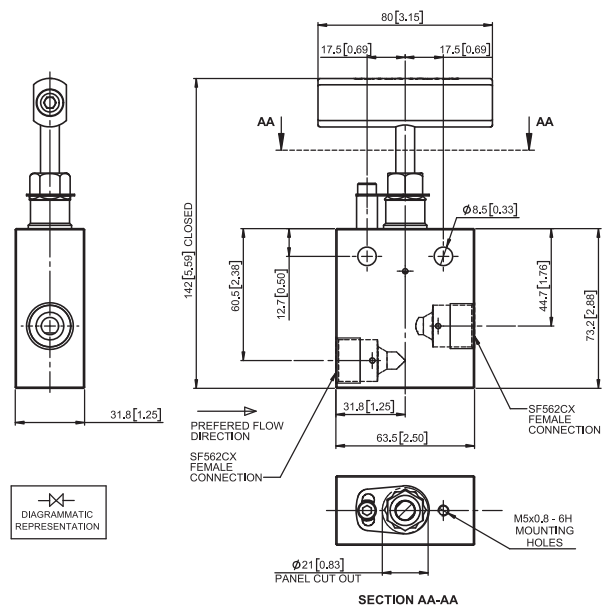


F75S/22.5HP/SF750CX




1. Design pressure 1,551 BAR (22,500PSI)(22.5HP).
2. Temperature rating -50°C (-60°F) to +240°C (+464°F).
3. 9 - 10 Turns from close to open.
4. 11.1mm (0.437") bore.
5. 3/4"MP cone & thread connections. (Gland & collar not supplied with valve).
6. 316 Stainless steel valve body. Other materials available on request.
7. UNS N07718 to ISO15156 spindle tip.
8. Aluminium bronze pusher.
9. Stainless steel T bar.
10. Glass/Moly filled PTFE gland seal.

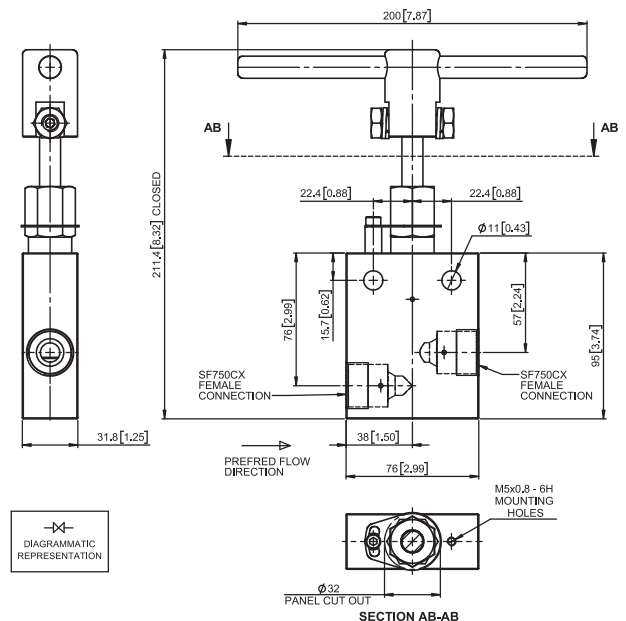

AF56S/22.5HP/SF562CX/BEDV

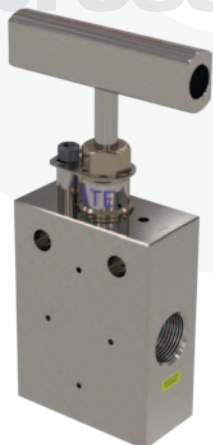


1. Design pressure 1,551 BAR (22,500PSI)(22.5HP).
2. Temperature rating -50°C (-60°F) to +240°C (+464°F).
3. 4 - 5 Turns from close to open.
4. 8mm (0.312") bore.
5. 9/16"MP cone & thread connections. (Gland & collar not supplied with valve).
6. 316 Stainless steel valve body. Other materials available on request.
7. UNS N07718 to ISO15156 spindle tip.
8. Aluminium bronze pusher.
9. Stainless steel T bar.
10. Glass/Moly filled PTFE gland seal.

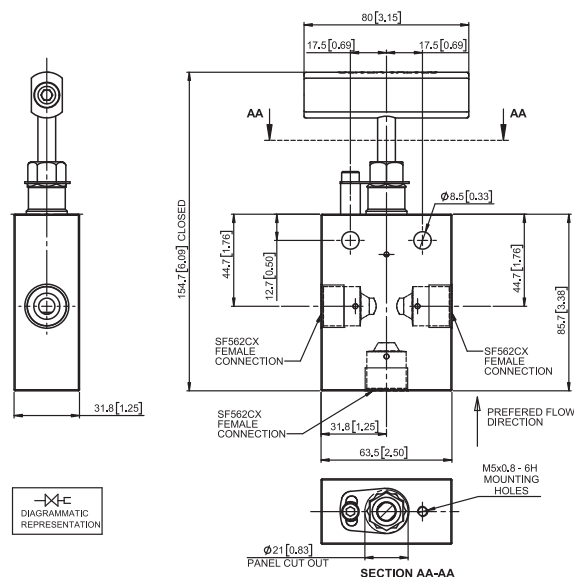

BBINS/22.5HP/SF562CX/SF562CX/SF526CX/RB

BLOCK & BLEED CONFIGURATION


1. Design pressure 1,551 BAR (22,500PSI)(22.5HP).
2. Temperature rating -50°C (-60°F) to +240°C (+464°F).
3. 4 - 5 Turns from close to open.
4. 2.7mm (0.437") bore.
5. 9/16"MP cone & thread connections. (Gland & collar not supplied with valve).
6. 316 Stainless steel valve body. Other materials available on request.
7. UNS N07718 to ISO15156 spindle tip.
8. Aluminium bronze pusher.
9. Stainless steel T bar.
10. Glass/Moly filled PTFE gland seal.

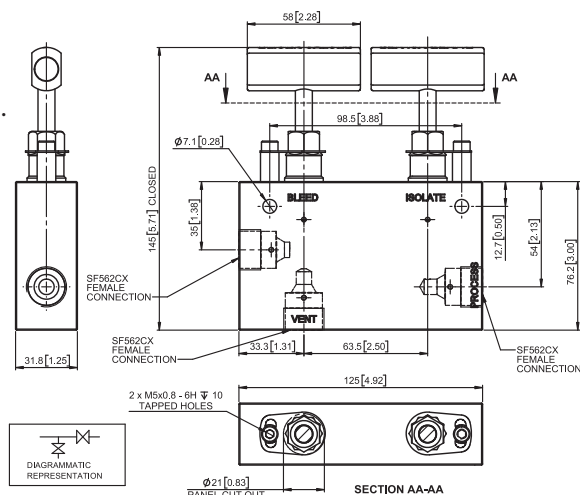

CV56S/22.5HP/SF562CX

CHECK VALVE

1. Design pressure 1,551 BAR (22,500PSI)(22.5HP).
2. Temperature rating -50°C (-60°F) to +240°C (+464°F).
3. 8mm (0.312") bore.
4. 9/16"MP cone & thread connections. (Gland & collar not supplied with valve).
5. 316 Stainless steel valve body. Other materials available on request.
6. FKM o-ring seat seal.
7. 1BAR (14.7PSI) nominal cracking pressure.


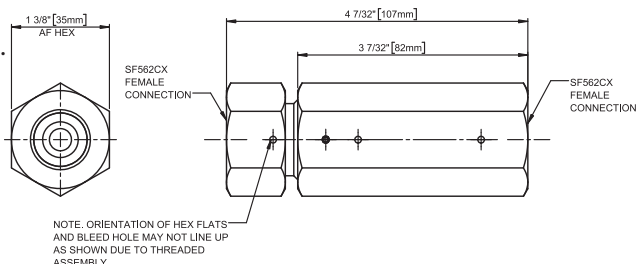


NOTE: ORIENTATION OF HEX FLATS AND BLEED HOLE MAY NOT LINE UP AS SHOWN DUE TO THREADED ASSEMBLY



22.5KSI MEDIUM PRESSURE VALVES

DBBINS/22.5HP/SF375CX/SF375CX/SF250CX

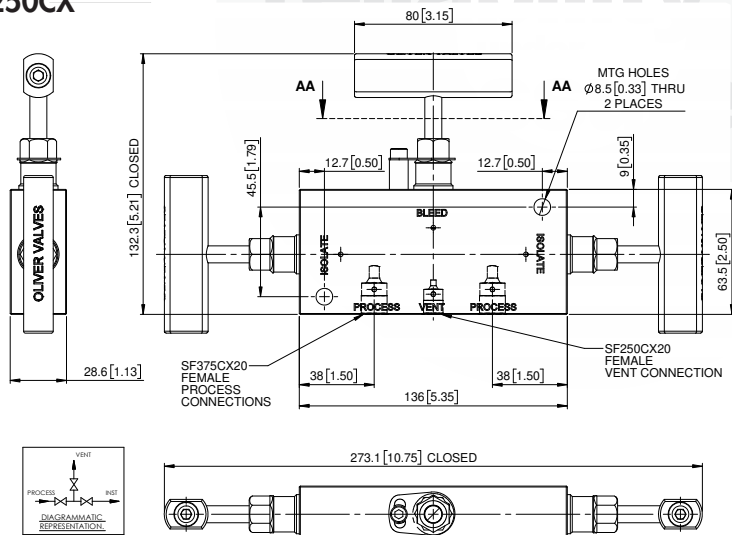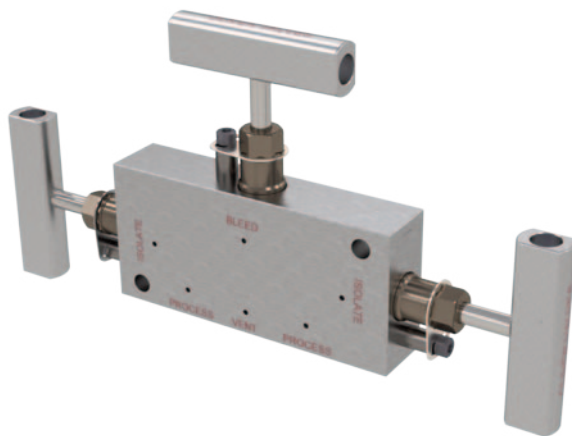

DOUBLE BLOCK & BLEED CONFIGURATION

1. Design pressure 1,551 BAR (22,500PSI)(22.5HP).
2. Temperature rating -50°C (-60°F) to +240°C (+464°F).
3. 4 - 5 Turns from close to open.
4. 5.15mm (0.203") process bore 2.7mm (0.109") vent bore.
5. 3/8" & 1/4" MP cone & thread connections. (Gland & collar not supplied with valve).
6. 316 Stainless steel valve body. Other materials available on request.
7. UNS N07718 to ISO15156 spindle tip.
8. Aluminium bronze pusher.
9. Stainless steel T bar.
10. Glass/Moly filled PTFE gland seal.

HOW TO ORDER 22.5KSI MEDIUM PRSSURE VALVES

Type	Material	Style	Connections Inlet	Connections Outlet	Connection Vent	Options
	S = 316 Stainless Steel IN625 = Inconel 625			22.5HP 22,500PSI Working Pressure		
F25	1/4"	Straight Pattern, Female x Female				
F56	9/16"	Straight Pattern, Female x Female				
F75	3/4"	Straight Pattern, Female x Female				
AF56	9/16"	Angle Pattern, Female x Female				
AF75	3/4"	Angle Pattern, Female x Female				
BBIN	9/16"	Block & Bleed Configuration, Female x Female				
CV56	9/16"	Check Valve				
DBBIN	3/8"	Double Block & Bleed Configuration, Female x Female				
Medium Pressure Cone & Thread Connections			High Pressure Cone & Thread Connections			
SF250CX	1/4"	F250C 1/4"				
SF370CX	3/8"	F375C 3/8"				
SF562CX	9/16"	F562C 9/16"				
SF750CX	3/4"	F750C 3/4"				
Gland & Collar not supplied with the valve			Gland & Collar not supplied with the valve			
BEDV	=	Bottom Entry DiVerter Valve				
RB	=	Reduced Bore				
PSL3	=	PSL3 Testing				
PSL3G	=	PSL3G Testing				





YCP24 TYPE

under
pressure



TWO VALVE INTEGRAL
MANIFOLD WITH TRANSMITTER

2 valve manifold, pipe to flange.


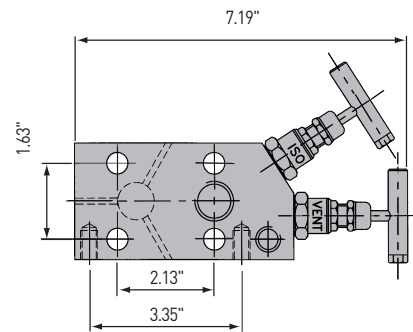


YCP34 TYPE



THREE VALVE INTEGRAL
MANIFOLD WITH TRANSMITTER

3 valve manifold, pipe to flange.


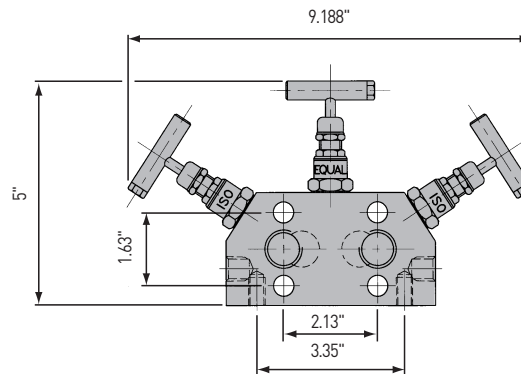


YCP53 TYPE



FIVE VALVE INTEGRAL
MANIFOLD WITH TRANSMITTER

5 valve manifold, pipe to flange.

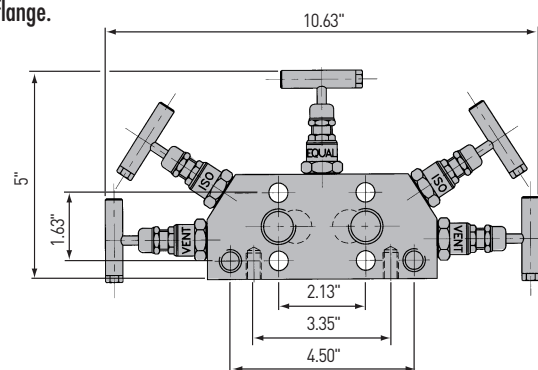


HEAD UNIT OPTIONS

PANEL MOUNT OPTION



Panel mount option.
Suffix / PM.

Note: Additionally drilled and tapped mounting holes (suffix /PMHT) top, or bottom (suffix /PMHB) available.

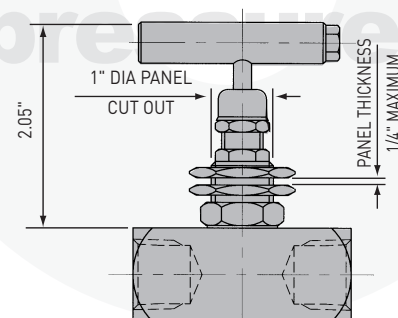


HAND WHEEL LOCKING AND POSITION INDICATOR OPTION



Hand wheel locking and position indicator option.
Suffix / HL-PL.


Note: Padlock is extra.
Suffix / PAD.

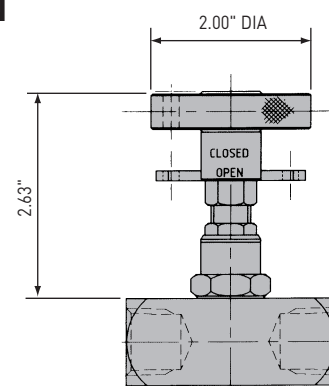

STAINLESS STEEL HAND WHEEL OPTION



Stainless steel hand wheel (316 grade).
Suffix / SSHW.

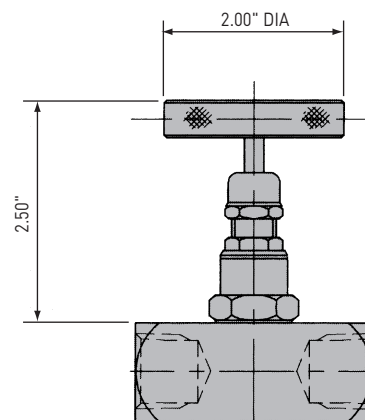


ANTI TAMPER OPTION



Anti-tamper option.
Suffix / AT.

Note: Anti-'key' is extra.
Suffix / AT-KEY.

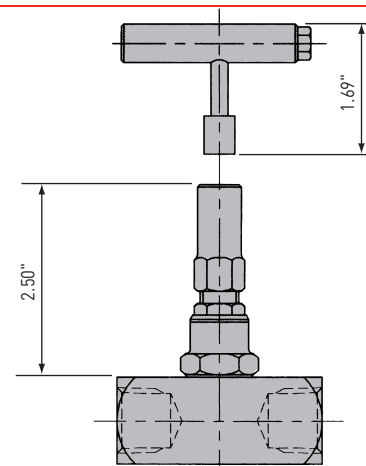


OXYGEN SERVICE OPTION

Degreased to air products A03 standard, suffix /OXY.




UNIVERSAL MOUNTING BRACKET

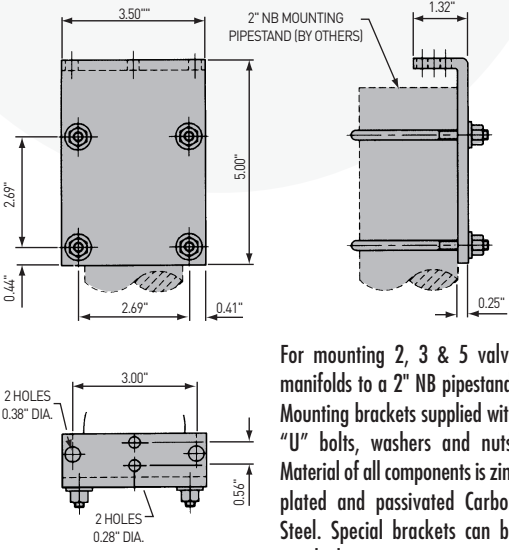


For mounting 2, 3 & 5 valve manifolds to a 2" NB pipestand. Mounting brackets supplied with "U" bolts, washers and nuts. Material of all components is zinc plated and passivated Carbon Steel. Special brackets can be supplied on request.


Y24/Y25



Y34/Y35




Y52/Y53



STEAM TRACE BLOCKS

The steam trace block is bolted to the manifold and because it is not an integral part of the manifold, stress levels (due to temperature cycling) are kept to a minimum. Steam trace blocks vary in size depending on manifold type.



MANIFOLD HEATING, ELECTRICAL

Specially designed 3/8" diameter cartridge manifold heater is available. The heater is inserted into the valve manifold and is protected by a brass cable gland and steel conduit designed for Zone 1 hazardous areas and approved to EExd and EExe IIc, BAS number: EX831220U. Output range either 25 or 50 watts, for 200/240 volts.


PP TYPE

1/4" & 1/2" pressure plugs.



CVP TYPE

Captive vent plugs 1/4" & 1/2" NPT size.

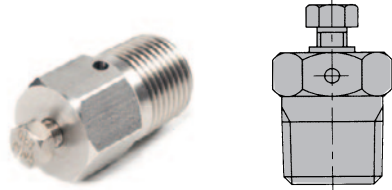


VP TYPE

Vent plugs 1/4" & 1/2" NPT sizes.



CVPT TYPE

Captive vent plug with T bar 1/2" NPT size.

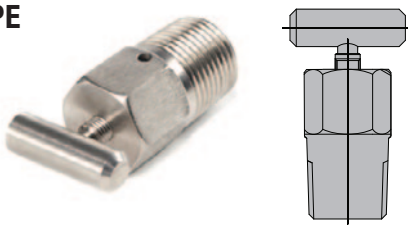


KIDNEY FLANGES




FLM50S TYPE

1/2" NPT Male threaded Kidney flange.



FLF50S TYPE


1/2" NPT Female threaded Kidney flange.



CV TYPE

Check valve. In line Poppet type. Allows flow in one direction only, closing when flow reverses.

Max Temperature	120°C		
Optional Pressures*	1/4", 3/8" & 1/2"	10,000 PSI	Add suffix /HP
Material & Trim	3/4" & 1"	6,000 PSI	
Connections	316 stainless steel	Springs 316 stainless steel	
Seat	NPT Female x Female		
	VITON (VITON 90 available for NACE. KALREZ and PEEK also available if required).		
	For hydraulic service PEEK must be used.		

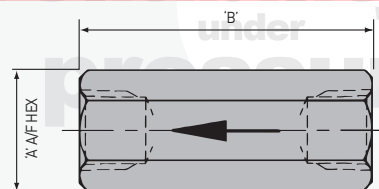

SIZES	PART NO	MAX PRESSURE	A	B	WEIGHT	CV (MAX)
1/4"	CV25S	6,000 PSI*	0.87"	2.31"	0.2kg	0.7
3/8"	CV38S	6,000 PSI*	1.10"	2.50"	0.3kg	0.7
1/2"	CV50S	6,000 PSI*	1.10"	3.06"	0.3kg	2.0
3/4"	CV75S	6,000 PSI	1.63"	3.63"	0.8kg	4.6
1"	CV10S	6,000 PSI	2.05"	4.19"	0.9kg	7.2

Note: Minimum cracking pressure 7 PSI, maximum cracking pressure 20 PSI.


GA50S TYPE

Swivel Gauge Adaptor

Seals	Metal
Max Temperature	540°C
Max Pressure	6,000 PSI
Standard Material	316 stainless steel
Standard Connections	1/2" NPT Male x Female

(Alternative connection sizes and materials available upon request).

Allows 360° positioning of gauges on site.

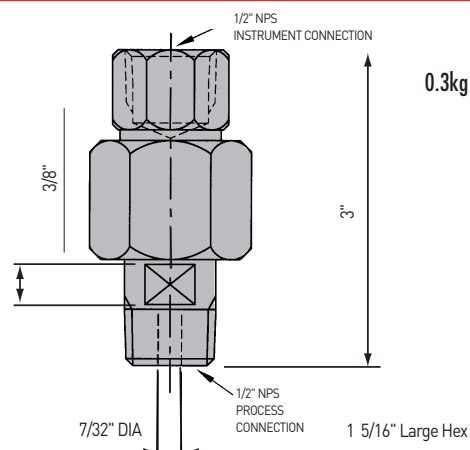

SN50S TYPE

Gauge Snubber (variable orifice)


Advantages

1. Only one spindle needed for all processes.
2. Snubbing rate can be altered after installation on site.
3. Anti-blowout spindle.
4. In emergency situation can be shut off.

Protects gauges from line surges by damping variations down, via a variable orifice.



Seals	VITON
Max Temperature	120°C
Max Pressure	6,000 PSI
Standard Material	316 stainless steel
Standard Connections	1/2" NPT Male x Female (SN50S)

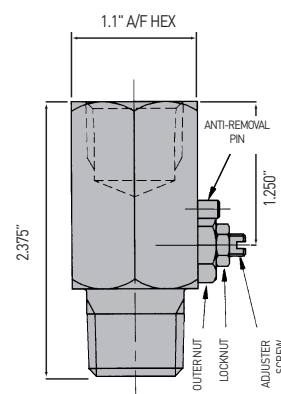


SY50S TYPE

Gauge Syphon

Max Pressure	6,000 PSI
Standard Material	316 stainless steel
Standard Connections	1/2" NPT Male x Female

1. More compact than "Pigtail" syphon.
2. All 316 stainless steel construction.

Protects gauges from steam by condensing into water via internal chambers.

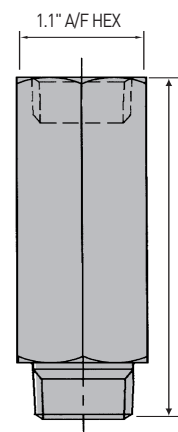

ADVANCED LOW TORQUE DESIGN

Our ball valves have very low operating torques, and a range of seat materials to give the ultimate in process environmental compatibility.

STAINLESS STEEL HANDLE

One piece stamped 316 Stainless Steel handle gives positive feel, quarter turn rust-free operation.

STOP PIN


A 316 Stainless Steel "dead stop" pin is held into the body by a machined anti-vibration spline.

SEATS

Our totally enclosed seats offer wide process compatibility whilst maintaining a positive sealing across the entire operating range. This high level of seat integrity allows both vacuum, and high pressure services from one valve.

FIRESAFE SEATS

This option, in the event of a fire, ensures the ball/seat metal to metal contact is maintained. Note that the body and stem seals are changed to graphite.

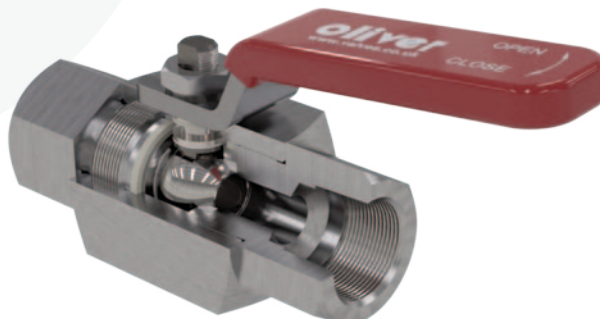

FULL FLOW

Positive 90° travel combined with clear thru' bores, review table for full or reduced bore.

PROCESS THREADS

CNC super finished screw cut threads ease assembly with reduced risk of galling.

SPINDLE

A one piece stem incorporates an anti-blowout shoulder which maintains seal integrity at all pressures. Twin anti-vibration lock nuts are standard.


BODY SEALS

Totally contained PTFE 'O' ring body seals give high body integrity, and additionally protect the body threads from process media.

BALL

This precision machined component is super finished assuring low operating torques.

BALL VALVE PRESSURE VS TEMPERATURE CURVE

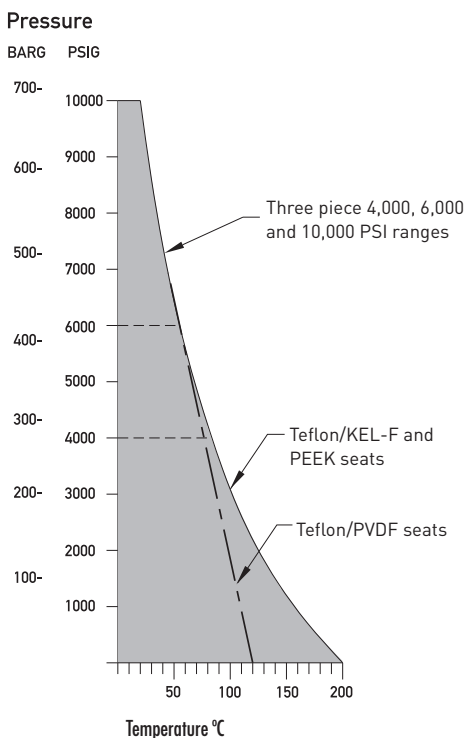

QUALITY ASSURANCE

ISO 9001 quality system registered by Lloyd's Register.

CERTIFICATION AND TRACEABILITY

All body components exhibit unique identification coding and material test certificates to BS EN 10204.

TESTING

All Oliver ball valves are subjected to three pressure tests, a hydrostatic test at the full rated pressure and low pressure pneumatic test at 50 PSI (3.5 BAR), as well as a shell test to 1.5 times working pressure.

VACUUM SERVICE

Our ball valves are suitable for vacuum service and have been tested at 0.01 mbar with no detectable leakage.

ANTI-STATIC OPTION

Can be specified with our ball valves.

CONTINUOUS DEVELOPMENT

of existing and new ball valve products maintain the highest levels of performance and integrity for our products. Oliver Valves maintain in-house fire test, cycling and combined pressure/temperature test facilities.

CRYOGENIC

Ball valves have been low temperature tested down to minus 196°C please consult factory with system specifications.

SEATS

- Three piece body 10mm ball valves with unique twin seat
120°C (250°F) maximum: Teflon/PVDF standard.
200°C (390°F) maximum: Teflon/KEL-F add /KL.
- Three piece 14 and 20mm ball valves with solid seat
200°C (390°F) maximum: PEEK.

Flow Co-efficient "C_v"

The Flow Co-efficient "C_v" of a valve is the flow of water (gallons/minute) through a fully opened valve, with a pressure drop of 1 psi across the valve.

$$Q_L = C_v \sqrt{\frac{\Delta P}{G}} \quad (\text{For liquid}) \quad Q_g = 61 C_v \sqrt{\frac{P_2 \Delta P}{g}} \quad (\text{For gas})$$

Q_L = flow rate of liquid (gal./minute)

ΔP = differential pressures across the valve (PSI)

G = specific gravity of liquid; (for water, G = 1)

Q_g = flow rate of gas (CFM at STP)

P₂ = outlet pressures (PSI)

g = specific gravity of gas; g air = 1.0000

Size	1/4"*	3/8"	1/2"	1/2"*	3/4"	1"
Bore (inches)	0.375	0.375	0.375	0.551	0.551	0.787
Bore (mm)	10	10	10	14	14	20
Flow C _v	6.3	6.3	6.3	11.7	11.7	27.9

* Over size bore




BALL VALVES TO 10,000 PSI


THREE PRESSURE RANGES 3,000 PSI (200 BAR), 6,000 PSI (400 BAR) AND 10,000 PSI (700 BAR). SIZES TO 1" NPT.

reliability
under
pressure


FEMALE x FEMALE THREADED ENDS



MALE x FEMALE THREADED ENDS



INTEGRAL TWIN FERRULE COMPRESSION ENDS



As standard not supplied with nuts and ferrules.
Suffix / NF (nuts and ferrules).

Style	Size	Max pressure (at 20° C)	Part number	Bore size		Dimensions (inches)					Max temperature °C	Weight Kg	CV
				mm	inch	A	B	C	D	E			
Twin ferrule compression fitting (Tube O.D.)	6mm	6000	B6BIX6mmS	10	0.40	3.97	1.25	2.50	3.31	-	200	0.4	6.3
	10mm	6000	B6BIX10mmS	10	0.40	3.97	1.25	2.50	3.31	-	200	0.4	6.3
	12mm	6000	B6BIX12mmS	10	0.40	4.13	1.25	2.50	3.31	-	200	0.4	6.3
	1/4"	6000	B6BIX25S	10	0.40	3.88	1.25	2.50	3.31	-	200	0.4	6.3
	3/8"	6000	B6BIX38S	10	0.40	3.88	1.25	2.50	3.31	-	200	0.4	6.3
	1/2"	6000	B6BIX50S	10	0.40	4.13	1.25	2.50	3.31	-	200	0.4	6.3
Female (NPT)	1/4"	6000	B6FX25S	10	0.40	2.38	1.25	2.50	3.31	2.94	200	0.4	6.3
		10000	B10FX25S	10	0.40	2.38	1.25	2.50	3.31	2.94	200	0.4	6.3
	3/8"	6000	B6FX38S	10	0.40	2.38	1.25	2.50	3.31	3.00	200	0.4	6.3
		10000	B10FX38S	10	0.40	2.38	1.25	2.50	3.31	3.00	200	0.4	6.3
	1/2"	6000	B6FX50S	10	0.40	3.38	1.25	2.50	3.31	3.63	200	0.5	6.3
		10000	B10FX50S	10	0.40	3.38	1.25	2.50	4.06	3.63	200	0.5	6.3
		6000	B6FY50S	14	0.55	4.07	1.50	3.00	4.06	4.50	240	1.2	11.7
	3/4"	6000	B6FY75S	14	0.55	4.07	1.50	3.00	4.06	4.75	240	1.1	11.7
		6000	B6FZ75S	20*	0.80	4.83	2.00	3.50	4.06	5.56	240	2.0	27.9
	1"	6000	B6FZ10S	20*	0.80	4.83	2.00	3.50	4.06	5.66	240	1.9	27.9

3/4" and 1", 10,000 PSI valves are available to special designs.

* 3/4" and 1" size's available with 10mm reduced bore.




www.valves.co.uk

HANDLE LOCKING OPTION



Valves can be locked in either the open or closed position with padlock available.
Suffix / HL.


Note: Padlock is extra.
Suffix / PAD.

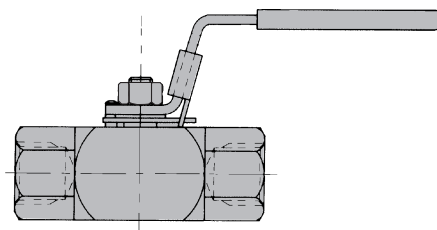

SPANNER ACTUATED OPTION



With Spanner actuation the valve is operated using a 1" A/F spanner, reducing tampering and accidental operation.
Suffix / SA.



PMB PANEL MOUNT OPTION




For all three piece ball valve body sizes this simple, and cost effective handle solution is a clear advantage.
Suffix / PMB.

PANEL MOUNT OPTION



For all three piece ball valve body sizes this simple, and cost effective handle solution is a clear advantage.
Suffix / PM.

OVAL HANDLE OPTION




An oval handle can be fitted as an option to the standard lever style (Plan view shown).
Suffix / OH.

ACTUATED BALL VALVE OPTION



A range of air, pneumatic or electric actuators can be factory or plant fitted to any Oliver ball valve.


TANGENTIAL LOCKING PIN OPTION

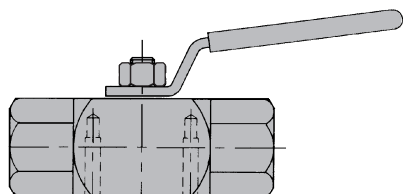

This simple but effective patented solution totally eliminates any possibility of inadvertent removal of end connector pieces by operator or vibration whilst in service.
Suffix / PE.

FIRESAFE/ANTI-STATIC OPTION

Tested to BS6755 part 2, these valves have body and stem seals in fire resistant Graphite. The metal lip seat is designed to ensure leak free seating when the seats burn in fire conditions. The spindle disc springs ensure a positive leak free gland.



3 WAY DIVERTER & SELECTOR VALVES


TYPE B*BL50S BOTTOM ENTRY DIVERTER VALVE



3 way single 'L' port ball
bottom entry 10mm
bore only in:-

3,000 PSI (*=3)
6,000 PSI (*=6)
10,000 PSI (*=10)

Note: Firesafe option not available.

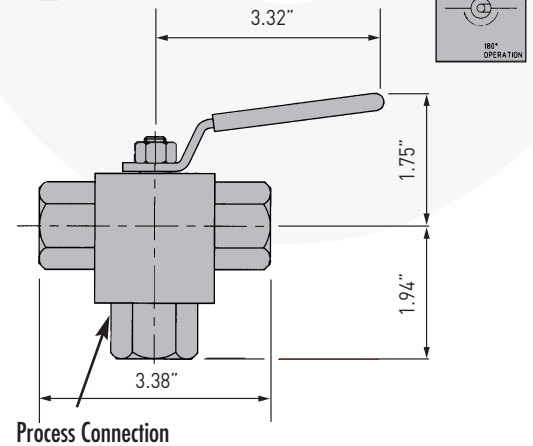


TYPE B*SL50S SIDE ENTRY DIVERTER VALVE




3 way single 'L' port ball
side entry 10mm
bore only in:-

3,000 PSI (*=3)
6,000 PSI (*=6)
10,000 PSI (*=10)

Note: Firesafe option not available.

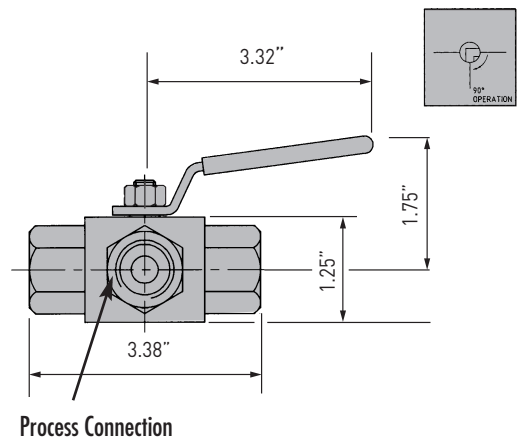


TYPE B*PMBSELF##S SELECTOR VALVE

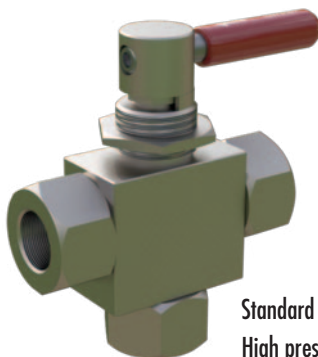

NPT Size	Length	Dimensions 'A'	##	Weight Kg
1/4"	3" [76MM]	3 17/32" [90MM]	25	0.56
3/8"	3 1/16" [78MM]	3 9/16" [91MM]	38	0.64
1/2"	3 3/8 [86MM]	3 23/32 [95MM]	50	0.64

Standard 6,000 PSI (414 BAR)(*=6)
High pressure 10,000 PSI rated (689 BAR)(*=10)
Temperature: -29°C to 121°C (at 6,000 and 10,000 PSI)

Panel cut out diameter 22mm min (7/8") to 25mm (1")
No further cutting of panel required for larger 1/2" connectors.
Min height from center to bottom of panel 16.5mm
Max height from center to top of panel 28mm, max panel thickness 11.5mm

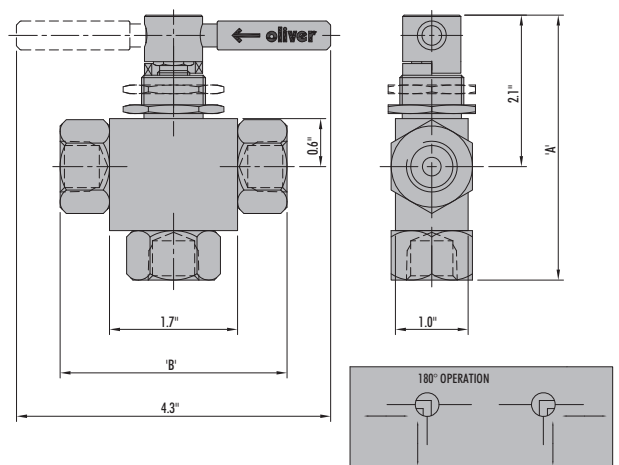


B6GM1S TYPE



Multiport ball valves allow compact solutions to the joint mounting of remote and local indicating instruments and can be supplied with a range of blanking or venting plugs and/or swivel gauge adaptors.

Max press PSI (at 20°C)	Bore size		Weight Kg	1/2" Male inlet & three 1/2" Female outlets	3/4" Male inlet & three 1/2" Female outlets
	mm	inches			
6000	10	0.40	0.7	B6XGM1S	B6XGM175-50S
10000	10	0.40	0.7	B10XGM1S	B10XGM175-50S

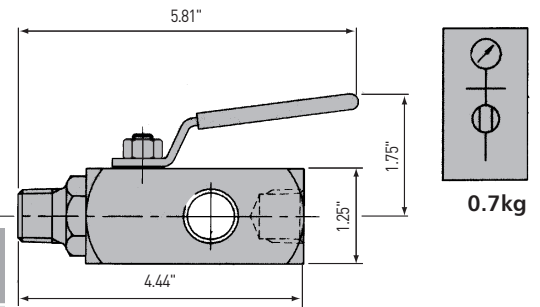


B6G12FFS TYPE



Standard connections 1/2" NPT (Female) inlet and outlet, with 1/4" NPT (Female) vent.


Max press PSI (at 20°C)	Bore size		Weight Kg	Remote mount 1/2" Female x Female connections
	mm	inches		
6000	10	0.40	1.3	B6XG12FFS

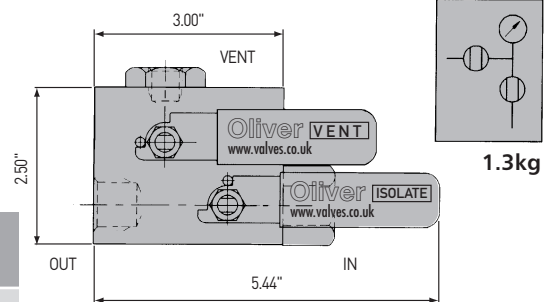

DBBL TYPE



Barstock body with three balls arranged for sampling, chemical injection and double block and bleed of instrument. Surface mounting option available. Cam Interlock option available to allow only the correct sequence of operation and to prevent accidental opening of the vent valve when the first isolation valve is open.

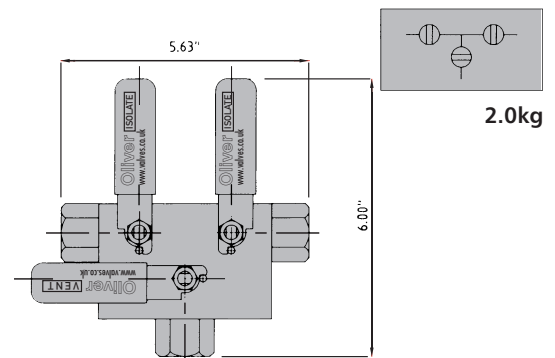

AIR HEADERS & LOW PRESSURE BALL VALVES TO 1,000 PSI

reliability
under
pressure

Oliver low pressure Air Headers fulfil the need for a manifold designed specifically for this pressure range. Manufactured from specially extruded section in 316 stainless steel or carbon steel.

Drawings show typical layouts – lengths, number of valves & flanges etc, to suit application.



STANDARD SPECIFICATION	
MAXIMUM WORKING PRESSURE	150 PSI
MAXIMUM TEMPERATURE	200°C
VALVE TYPE	BALL VALVES



FEATURES AND BENEFITS

These families of high performance quality ball valve products are stocked in CF8M cast stainless steel with 316 stainless steel trim and pressed 304 stainless steel handle avoiding rusting on site.
Offered in pressure ranges from 1,000 PSI to 3,000 PSI and sizes from 9mm to 19mm diameter bores these valves are recommended for use in oil, gas and petrochemical applications where reliable long-term performance is essential.
Threaded connections are NPT, Handle Locking Standard, NACE Standard, Firesafe Standard (on 3,000 PSI version).

BALL VALVES TO 1,000 PSI

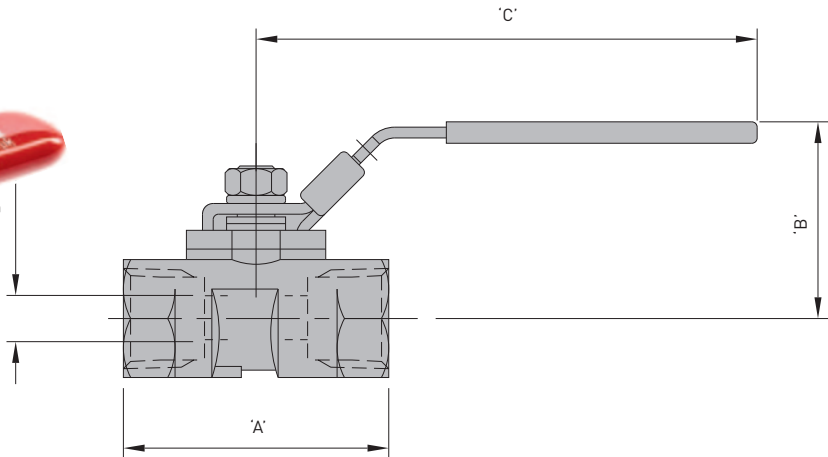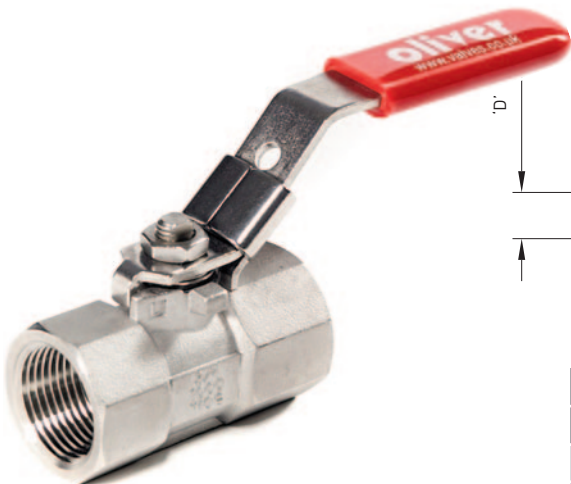

DIMENSION						
SIZE	'A'	'B'	'C'	'D'	PART No	Weight Kg
1/4"	2.150"	1.875"	4.250"	9mm	LPB1F2SS/HL/NA	0.22
3/8"	2.150"	1.875"	4.250"	9mm	LPB1F38S/HL/NA	0.22
1/2"	2.220"	1.875"	4.250"	9mm	LPB1F50S/HL/NA	0.20
3/4"	2.420"	2.062"	4.250"	12mm	LPB1F75S/HL/NA	0.28
1"	2.930"	2.375"	5.830"	16mm	LPB1F10S/HL/NA	0.48



reliability
under
pressure



STANDARD SPECIFICATION

MAXIMUM WORKING PRESSURE		6,000 PSI
VALVE TYPES	BALL VALVES	NEEDLE VALVES
MAXIMUM TEMPERATURE	200°C	240°C


Oliver high pressure Distribution Manifolds fulfil the need for a specific manifold working at instrument pressures. Designed in conjunction with our customers requirements.

Drawings show typical layouts – lengths, number of valves & flanges, etc. to suit application. Needle valves and ball valves shown.

See back page for how to specify.


CMDM TYPE

Compact Mount Distribution Manifold utilising needle valves.

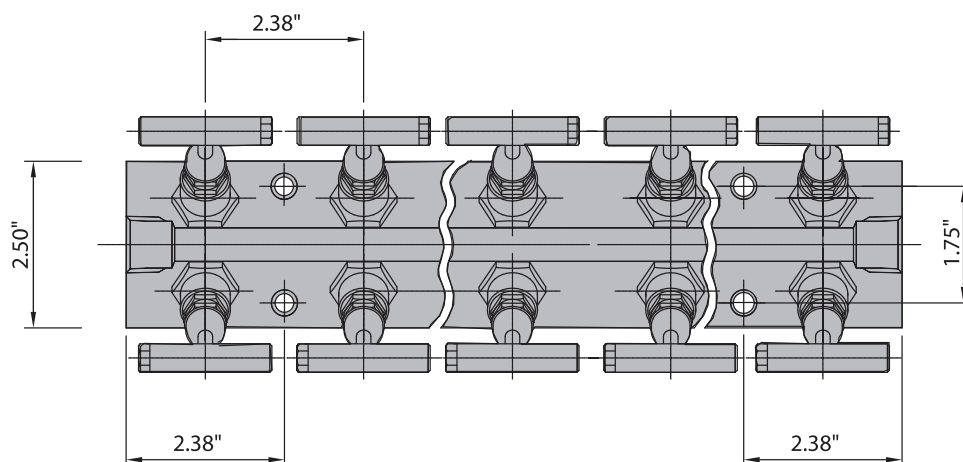

DM TYPE

Distribution Manifold utilising ball valves.

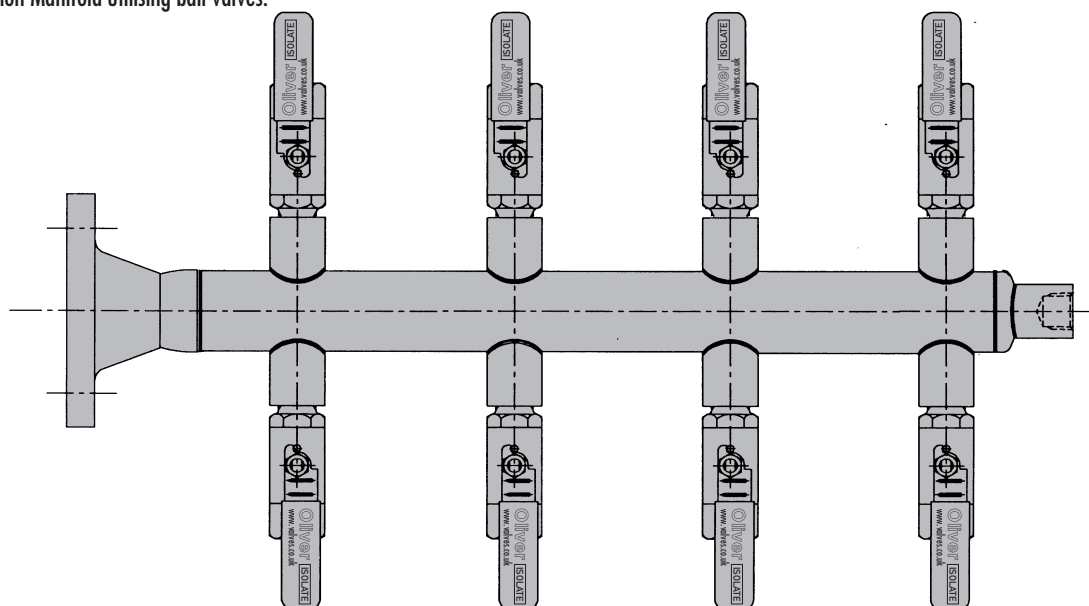

HOW TO ORDER NEEDLE VALVES

reliability
under
pressure

Y33 S / AG

MANIFOLD TYPE

MATERIAL SELECTION

S — 316 Stainless Steel standard (316)
SL — 316 Stainless Steel (316L)
C — 230M07 Carbon Steel plated (En1a)
CB — 070M20 Carbon Steel (En3b) for NACE
M — Monel (400)
HC — Hastalloy (C276)
IL825 — Incoloy (825)
IN625 — Inconel (625)
DUP — Duplex (UNS S31803)
Ti248 — Titanium (248)

EXAMPLE

F25S/NA/PM

F — Female x Female connections
25 — 1/4" size (NPT Standard)
S — 316 Stainless Steel
NA — NACE specification
PM — Panel mounting option

Process connection options

BP	BSP Parallel (top sealing standard)
BT	BSP Taper
BW-SCH***	Butt weld, Schedule 40, 80, 160, XXS (Nominal Pipe Size)
SW-SCH***	Socket weld, Schedule 40, 80, 160, XXS (Nominal Pipe Size)
SW-OD	Socket weld, outside diameter (tube)
BW-OD	Butt weld, outside diameter (tube)

Other Options: (Specify in alphabetical order)

AG	Graphite packing
AT	Anti-tamper (e.g. AT-V if vent)
AT-KEY	Anti-tamper key
ATEQ	AT on equalise (for 3 and 5 valve manifolds)
BKTC	CS bracket complete with mounting bolts
BKTS	SS bracket complete with mounting bolts
FS	Firesafe
HD	6,000 PSI
HD/HP	10,000 PSI max pressure (Heavy Duty Head Unit, for isolation valves only)
HD/15HP	15,000 PSI max pressure (Heavy Duty Head Unit, for isolation valves only) with autoclave fitting
HL	Handwheel locking (PAD - Padlock)
HL-PI	Handwheel locking and position indication
HP	10,000 PSI maximum pressure rating (except direct mount) for Standard Needle Valve
ISO	ISO Fugitive Emissions head unit
LT200	Cryogenic head unit (down to -200°C)
MTG	2 Mounting holes to mount BKT
MT	Metering tip
NA	NACE MR-01-75 latest revision
NF	Nuts and ferrules on BI type
OXY	Oxygen clean degreased
PAD	Padlock (for HL option)
PK	PEEK Soft tip (up to 6000psi only)
PM	Panel Mount (gauge valves only)
PP	Pressure plug
SG	Graphite flange seal rings
SSHW	Stainless steel handwheel
SSB	Stainless steel bolts (rated to 4,800 PSI) for Direct Mount Manifold
SSB-6K	Stainless steel bolts (rated to 6,000 PSI) for Direct Mount Manifold
SS-TAG	Stainless steel tag
ST	Stellite 6 hard tip
2H	2 mounting holes

HOW TO ORDER BALL VALVES

B 6 F X 50 S / HL

BALL VALVE

PRESSURE RANGES

6 6,000 PSI (c.w.p.)
10 10,000 PSI (c.w.p.)

CONNECTIONS

F Female x Female
M Male x Female
BI Compression ended
SL Side entry "L" port diverter valve
BL Bottom entry "L" port diverter valve
PMBSEL Selector valve

BALL VALVE BORES

W = 0.20" (5mm) Y = 0.55" (14mm)
X = 0.40" (10mm) Z = 0.80" (20mm)

OR MANIFOLD PART NO

CONNECTION SIZES

12 = 1/8" 38 = 3/8"
25 = 1/4" 50 = 1/2"

6mm = 6mm O.D. compression fitting
10mm = 10mm O.D. compression fitting
12mm = 12mm O.D. compression fitting
Manifold connections are 1/2" NPT STANDARD

MATERIAL SELECTION

S BS970-316S11/S31 STAINLESS STEEL
STANDARD
M MONEL 400
DUP DUPLEX STAINLESS STEEL UNS S31803
(other materials available on request)

Process connections

BT	BSP taper thread**
BP	BSP parallel thread** (top sealing standard)

Options: (Specify in alphabetical order)


BKTC	Bracket (carbon steel)
BKTS	Bracket (stainless steel)
FS	Firesafe (BS6755 Part 2)
HL	Handle locking (PAD = Padlock)
NA	NACE MR-01-75 latest revision
OH	Oval Handle
PE	Pinned ends
PM	Panel Mount 4 x M5 holes
PMB	Panel Mount screwed Boss
SA	Spanner actuation (1" A/F)
NF	Nuts and ferrules on BI type
LT200	Cryogenic head unit (down to -200°C)

Seats

- THREE PIECE BODY 10mm Ball valves with unique twin seat — Teflon/PVDF — standard, Teflon/KEL-F-add/KF
- THREE PIECE BODY 14mm and 20mm Ball valves with solid seat PEEK — standard




www.valves.co.uk

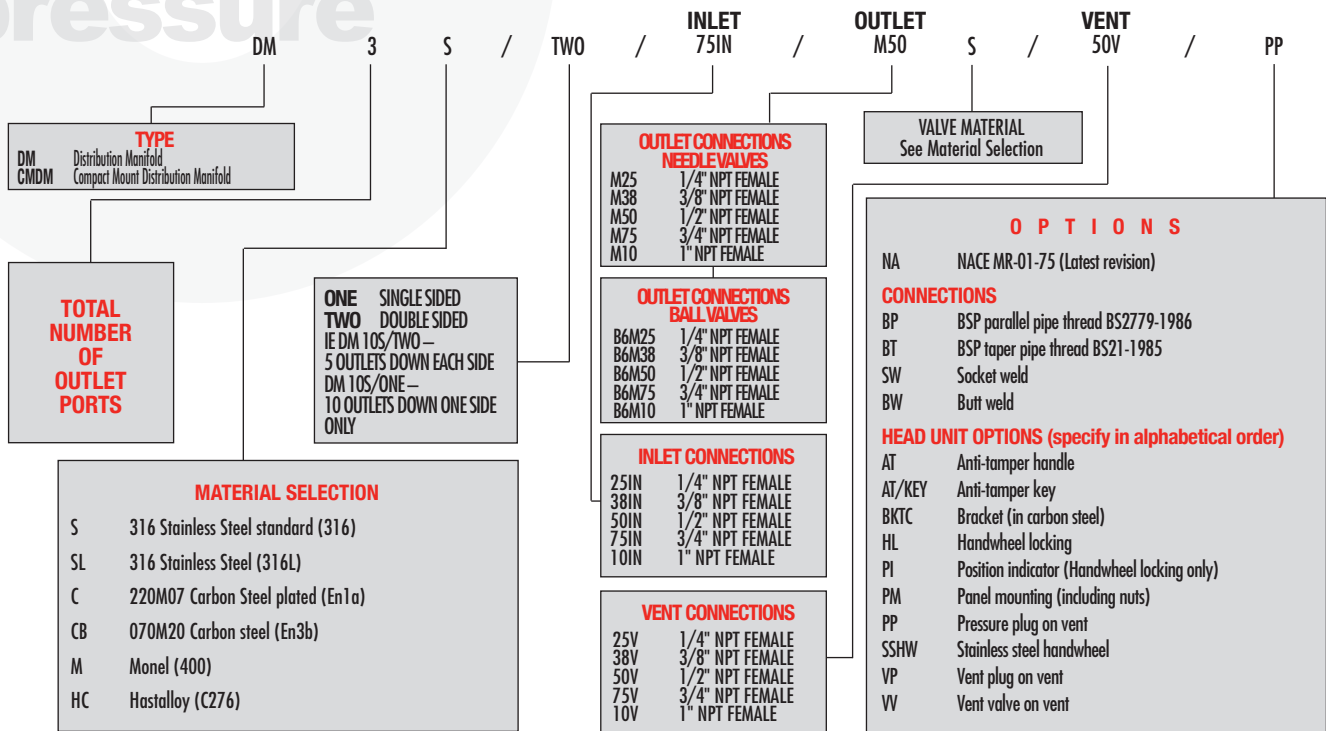

EXAMPLE: DM8S TWO/50IN/M38S/75V/PP

Distribution manifold with four 3/8" NPT Female Oliver Needle valves on outlets down each side with 1/2" NPT Female inlet and 3/4" NPT Female outlet, and pressure plug on vent.

HOW TO ORDER AIR HEADERS

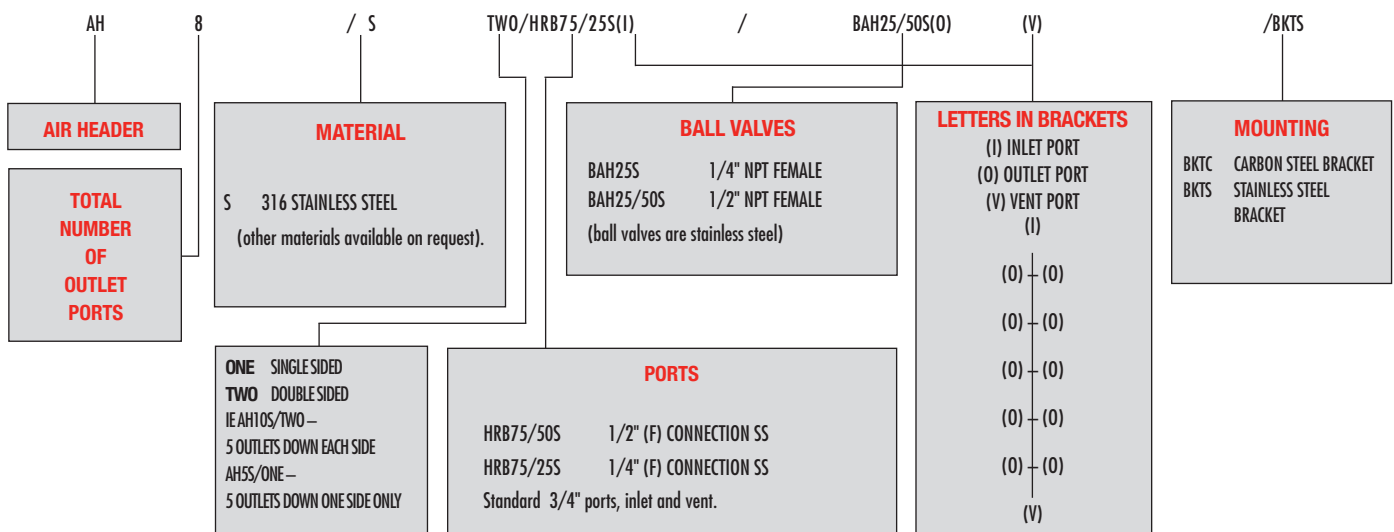

EXAMPLE: AH20C/TWO/HRB75/50C (I)/BAH25S (OV)

A 20-way double sided (10 down each side) air header in carbon steel with 1/2" NPT Female inlet, 1/4" NPT Female ball valve outlets and a 1/4" NPT Female ball valve vent. All ball valves are stainless steel.



reliability
under
pressure



- Oliver Valves in the early 80's pioneered this concept, which has very much now become a standard world wide. Each Double Block & bleed has a unique number recording its factory history and we are now way above 100,000 of these units in installation worldwide.
- A smaller unit vs the traditional hook-up, bringing both piping and instrumentation isolation into one unit – this means;
- Less weight, which is significant on the top side of a platform, when you combine all the pressure instrument take-offs. Typical installation it is reduced from 33kg to 7kg, a weight reduction of 75%!
- Weight reduction is also an issue when take-off is horizontal, this instils a bending moment and could cause critical fracture of pipeline interface and is generally overcome by adding more stanchions & cussetting to support traditional installation, which adds even more weight.
- Cost reduction – typically 30% saving over traditional installation, which jumps up to 70% in the case of valves made from exotic materials for more exacting processes!
- Cost saving on site – the cost of one factory tested component, as opposed to different piping valves, instrument valves, flanges, connections and flanged seal rings and then the cost to raise purchase orders and expediting department to chase the parts in goods receivable, etc., and then the shipping costs are larger and weightier, specs must all be taken into account, rises in cost can be 30% of the overall cost. Coded welders could be required as well.
- Safety – including spool pieces the type of valve, i.e. standard 3-piece valve used in installation may have as many as nine additional leak points.
- Health & safety legislation is moving more and more towards testing at a considerable cost to each one of these joints after installation, cost of which can be excessive.
- Health & Safety – USA and abroad process safety management document OCEA 3132, here in the UK Health & Safety Executive application HSG253 which is readily downloadable free, states double block & bleed must be used. All these documents stem from the Piper Alpha disaster over 20 years ago and the P36 disaster in Brazil, both of which indicated double block & bleed as a marked improvement for safety.
- The 'top-hat' or T-section forging use of the body of the valve, and the H section use of flange to flange variance is upset forged, which means the grain flow of the material flows into the flange, making for a very strong body.
- First isolation is to a full piping valve ASME V111 specification, ball configurations whether they be standard 2-ball valves isolate and needle valve vent, 3-needle valves or 3-ball valves are all firesafe certified valves.
- Delivery – the DBB part machine program that was set-up many years ago, in which we machined all aspects of the double block & bleed apart from one aspect, the customer specifies which is the flange, which leads to very quick lead times.
- Any different variations, including vent and injection, ball range, exotic materials, all the options available from standard ball and needle valves.



reliability
under
pressure

ADVANCED DESIGNS

Our products conform to the latest international design specifications and are approved by leading companies.

TOUGH HANDLES

Rugged, 316 stainless steel, low torque, quarter turn handles will not rust in offshore service.

POSITIVE STOP PINS

A 316 stainless steel pin held into the body by a machined anti-vibration spline assures an absolute 90° turn.

HIGH PERFORMANCE SEATS

Unique enclosed seats offer great process compatibility but restrict creep or distortion in service. Our approach achieves high levels of seat integrity at low and high pressures.

FIRESAFE BALL VALVES

Go metal to metal in a fire to reduce leakage due to seat destruction.

BALL

This precision machined component is super finished assuring low operating torques.

THROUGH BORE OF BALL VALVES

True positive 90° opening combined with clear through bores across the range.



EXPLOSIVE DECOMPRESSION

Explosive decompression occurs when gas at high pressure permeates into seal materials. When the gas pressure is reduced the absorbed gas expands which can cause the seals to swell and blister. Oliver Valves only use seal material within their 'Double Block and Bleed Valve' range that are resistant to explosive decompression.

PRECISION PROCESS THREADS

Super finished screwcut – not tapped threads – using advanced CNC machines ensure easy assembly and leak tight threads with reduced risk of galling.

SOLID BACKSEATED ANTI-BLOWOUT SPINDLE

Precision, rugged one piece stem incorporates anti-blow out feature and maintains seal integrity at all pressures. Anti-vibration lock nuts are standard to all products.

BODY SEALS

Totally contained 'O' ring type body seals for body integrity and additionally protecting internal body threads from process media.

DROP FORGED BODY

A rigid one piece drop forged body, eliminates potential leak points experienced with conventional hook ups.

'BLOK-LOK' (PATENT PENDING)

Anti-removable pin, non-welded connector locking system which prevents accidental disassembly when in service.

HEAVY DUTY FIRESAFE NEEDLE VALVES

Oliver's proven heavy duty needle pattern head unit features a rugged firesafe and tested construction.

OPTIONS

CARBON STEEL DOUBLE BLOCK AND BLEED VALVES have stainless steel end adaptors, seal housings and inserts as standard construction. The parts mentioned can also be made from carbon steel if specifically requested. Plating as standard with painting options available.

HANDLE LOCKING - /HL Oliver unique handle locking system will prevent accidental operation – tamper-proof.

SPANNER ACTUATION - /SA Oliver tamper-proof spanner actuation – for ball valve handles only.

STANDARD


FIRESAFE - /FS Firesafe construction compliant with BS 6755 part 2. API 607 and API 6FA. Fully certified to Lloyds type approval certificate numbers 88/0345, 91/0117, 92/0140 and 93/00068. High temperature Graphite replaces PTFE for seals.

NACE - /NA Compliance to NACE specification MR-01-75 latest revision – suitable for sour service – resistant to sulphide stress corrosion cracking. 316 stainless steel is solution annealed for trims.



DOUBLE BLOCK & BLEED VALVE SOLUTIONS

reliability
under
pressure

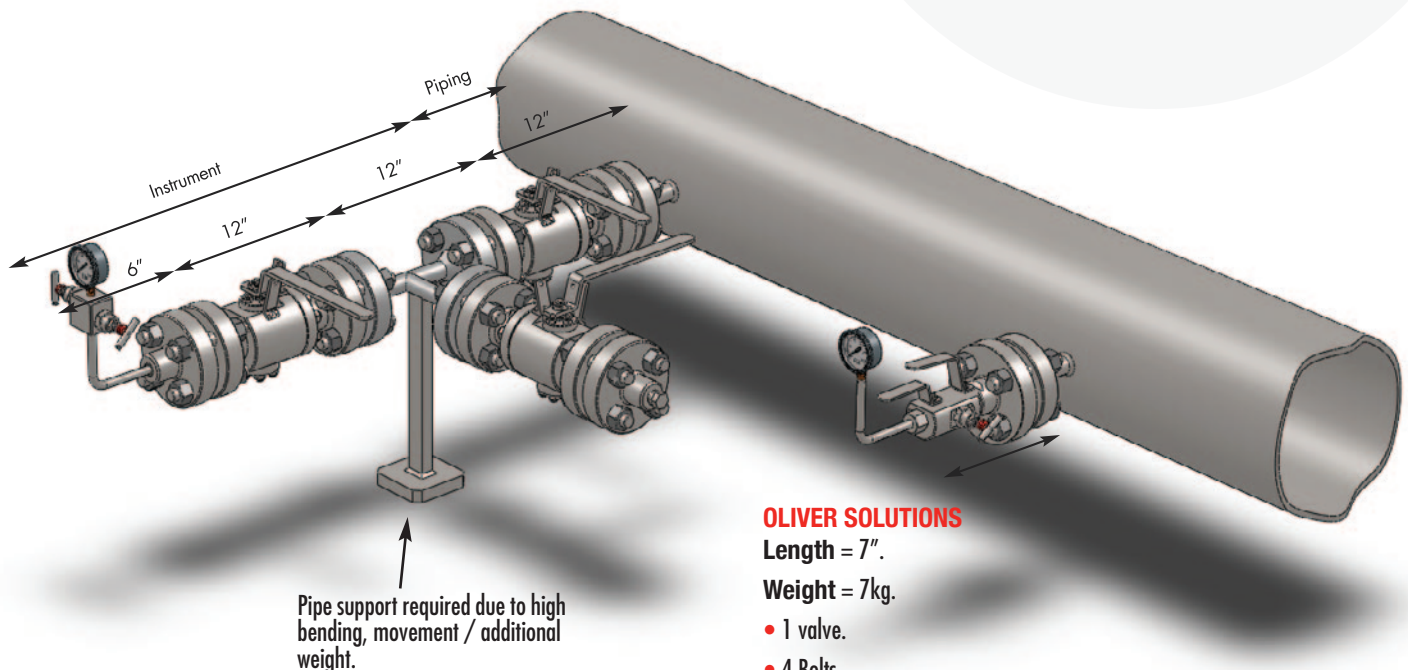

OLIVER SOLUTIONS

Length = 7".

Weight = 7kg.

- 1 valve.
- 4 Bolts.
- 1 Gasket.

YOUR PROBLEM

Length = 42".

Weight = 100kg (based on 1.5" 1500 class).

- 3 Ball & needle valve manifolds.
- 24 Bolts.
- 6 Gaskets.


Your Key Selling Points

- We eliminate a terrific amount of space when compared with welding three individual valves together.
- We save a huge amount of direct labour and site installation costs.
- We have reduced leakage points massively - a huge benefit as fugitive emissions are so important.
- We have reduced costs.
- We only have one component to be ordered, not many as in the old applications, which can save on inventory and site confusion.
- We can get away from local site support by reducing the bending moment.
- We can bring the pressure instrument a lot closer to the point of pressure measurement thus saving space which is most important on skip mounting applications.
- Unique numbering system on each valve recording factory history (the "original manufacture being over 25 years and 200,000+ sold).




Oliver's unique approach offers the designer of sampling, draining, injection and pressure instrument take-off points a simple, rigid, compact, safe, low-cost option to "CONVENTIONAL PRACTICE". Our double block and bleed valves are used in critical applications, where cost, weight and space saving are paramount for:

- Pressure instrument take-off points.
- Sampling systems, where a pipeline probe is integral with our valve.
- Chemical injection systems, where a check valve is part of our valve assembly.
- Drains for tanks and pipes, where space is restricted.
- High pressure firesafe diverter valves.
- Hydraulic power unit systems.
- Reduced vibrational stresses.
- Cost savings with exotic material designs are huge.

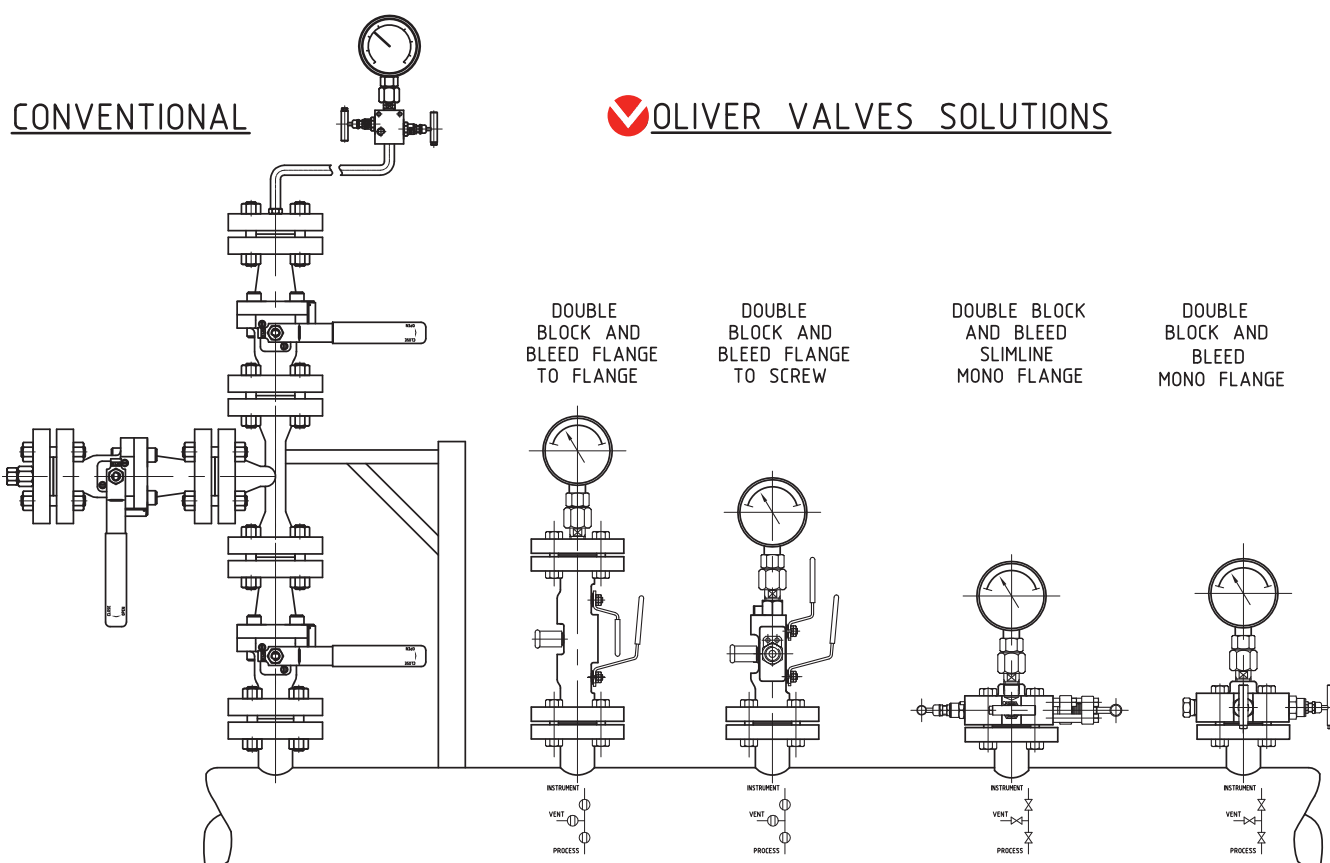



D TYPE DOUBLE BLOCK & BLEED



Machined from a single piece 'grain flow controlled' forging. This valve features two in-line ball pattern primary and secondary isolating valves with a heavy duty needle valve vent, in bore sizes from 10mm to 20mm (0.4" to 0.8").

This all forged manifold comprises two in-line ball primary and secondary isolating valves with a heavy duty needle valve vent. In bore sizes from 10mm to 14mm (0.4" to 0.55").

reliability
under
pressure

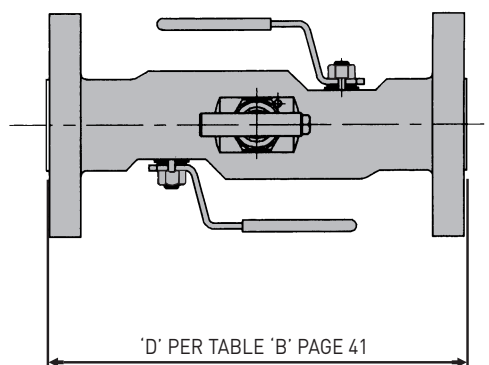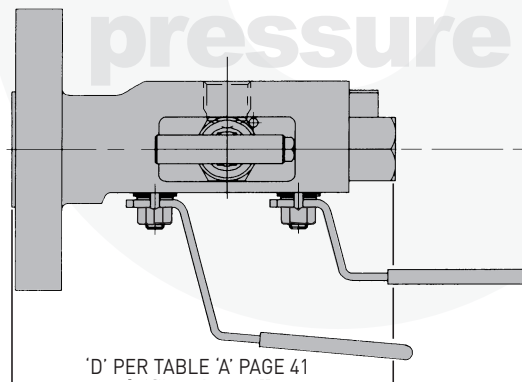

FLANGE TO PIPE – THREE BORES – THREE STANDARD MATERIALS

SIZE RANGES		
BALL VALVE BORE 0.40"/10mm CV 6.3	BALL VALVE BORE 0.55"/14mm CV 11.7	BALL VALVE BORE 0.80"/20mm CV 27.9
Flange size 1/2" NB to 2" NB, Flange Classes 150 to 2500 RF & RTJ. Also API 5K & API 10K.	Flange size 3/4" NB to 2" NB, Flange Classes 150 to 2500 RF & RTJ. Also API 5K & API 10K.	Flange size 1" NB to 2" NB, Flange Classes 150 to 2500 RF & RTJ. Also API 5K & API 10K.
Outlet connection: 1/2" NPT Female standard. Vent connection: 1/2" NPT Female standard.	Outlet connection: 3/4" NPT Female standard. Vent connection: 1/2" NPT Female standard.	Option – 3" NB, 150 to 2500 Outlet connection: 1" NPT Female standard. Vent connection: 1/2" NPT Female standard.

CARBON STEEL

Standard specification – ASTM A350 LF2 body material with BS970 316 S11/S31 barstock stainless steel trims, Inserts, End adaptors with PTFE seats and PTFE/Graphite seals and gland packings. Standard 1/4 turn lever 1/2 turn to vent. All end adaptors have Oliver BLOK-LOK protection against accidental disassembly.

DUPLEX STAINLESS STEEL

Standard specification – ASTM A182 F51 body material with UNS S31803 barstock steel trims, Inserts, End adaptors with PTFE seats and PTFE/Graphite seals and gland packings. Standard 1/4 turn lever 1/2 turn to vent. All end adaptors have Oliver BLOK-LOK protection against accidental disassembly.

FLANGE TO FLANGE – THREE BORES – THREE STANDARD MATERIALS


SIZE RANGES		
BALL VALVE BORE 0.40"/10mm CV 6.3	BALL VALVE BORE 0.55"/14mm CV 11.7	BALL VALVE BORE 0.80"/20mm CV 27.9
Flange size 1/2" NB to 2" NB, Flange Classes 150 to 2500 RF & RTJ. Also API 5K & API 10K.	Flange size 3/4" NB to 2" NB, Flange Classes 150 to 2500 RF & RTJ. Also API 5K & API 10K.	Flange size 1" NB to 2" NB, Flange Classes 150 to 2500 RF & RTJ. Also API 5K & API 10K.
Outlet connection: Flange size & Class can be different from inlet. Vent connection: 1/2" NPT Female standard.	Outlet connection: Flange size & Class can be different from inlet. Vent connection: 1/2" NPT Female standard.	Outlet connection: 1" NPT Female standard. Vent connection: 1/2" NPT Female standard.

STAINLESS STEEL

Standard specification – ASTM A182 F316 body material with BS970 316S11/S31 barstock stainless steel trims, Inserts, End adaptors with PTFE seats and PTFE/Graphite seals and gland packings. Standard 1/4 turn lever 1/2 turn to vent. All end adaptors have Oliver BLOK-LOK protection against accidental disassembly.



STANDARD	
NACE:	Conformance to NACE MR-01-75 (latest revision).
FIRESAFE:	Firesafe construction.
OPTIONS	
INJECTION:	Available for chemical injection service (page 47).
SAMPLING:	Available for sampling service (page 47).





Machined from a single piece 'grain flow controlled' forging. This valve features two in-line ball pattern primary and secondary isolating valves with ball valve vent, in bore sizes from 10mm to 14mm (0.4" to 0.55").

This all forged manifold comprises two in-line ball primary and secondary isolating valves with ball valve vent. In bore sizes from 10mm to 14mm (0.4" to 0.55").

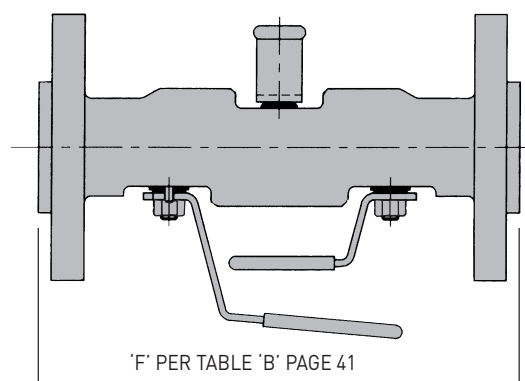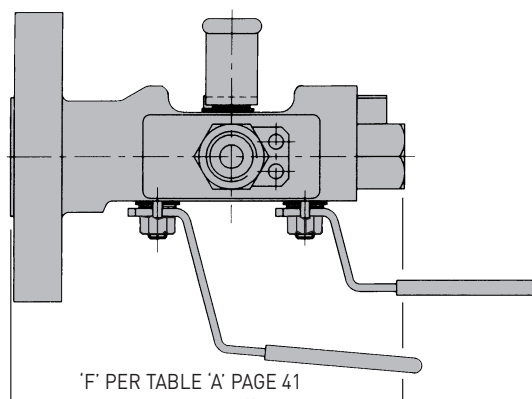

FLANGE TO PIPE – TWO BORES – THREE STANDARD MATERIALS

SIZE RANGES	
BALL VALVE BORE 0.40"/10mm CV 6.3	BALL VALVE BORE 0.55"/14mm CV 11.7
Flange size 1/2" NB to 2" NB, Flange Classes 150 to 2500 RF & RTJ. Also API 5K & API 10K.	Flange size 3/4" NB to 2" NB, Flange Classes 150 to 2500 RF & RTJ. Also API 5K & API 10K.
Outlet connection: 1/2" NPT Female standard. Vent connection: 1/2" NPT Female standard.	Outlet connection: 3/4" NPT Female standard. Vent connection: 1/2" NPT Female standard.

CARBON STEEL

Standard specification – ASTM A350 LF2 body material with BS970 316 S11/S31 barstock stainless steel trims, Inserts. End adaptors with PTFE seats and PTFE/Graphite seals and gland packings. Standard 1/4 turn lever 1/2 turn to vent. All end adaptors have Oliver BLOK-LOK protection against accidental disassembly.

DUPLEX STAINLESS STEEL

Standard specification – ASTM A182 F51 body material with UNS S31803 barstock steel trims, Inserts, End adaptors with PTFE seats and PTFE/Graphite seals and gland packings. Standard 1/4 turn lever 1/2 turn to vent. All end adaptors have Oliver BLOK-LOK protection against accidental disassembly.

Note: 20mm Bore available in Bolted construction only.

FLANGE TO FLANGE – TWO BORES – THREE STANDARD MATERIALS

SIZE RANGES	
BALL VALVE BORE 0.40"/10mm CV 6.3	BALL VALVE BORE 0.55"/14mm CV 11.7
Flange size 1/2" NB to 2" NB, Flange Classes 150 to 2500 RF & RTJ. Also API 5K & API 10K.	Flange size 3/4" NB to 2" NB, Flange Classes 150 to 2500 RF & RTJ. Also API 5K & API 10K.
Outlet connection: Flange size & Class can be different from inlet. Vent connection: 1/2" NPT Female standard.	Outlet connection: Flange size & Class can be different from inlet. Vent connection: 1/2" NPT Female standard.


STAINLESS STEEL

Standard specification – ASTM A182 F316 body material with BS970 316S11/S31 barstock stainless steel trims, Inserts, End adaptors with PTFE seats and PTFE/Graphite seals and gland packings. Standard 1/4 turn lever 1/2 turn to vent. All end adaptors have Oliver BLOK-LOK protection against accidental disassembly.

STANDARD	
NACE:	Conformance to NACE MR-01-75 (latest revision).
FIRESAFE:	Firesafe construction.
OPTIONS	
INJECTION:	Available for chemical injection service (page 47).
SAMPLING:	Available for sampling service (page 47).



N TYPE DOUBLE BLOCK & BLEED



Machined from a single piece 'grain flow controlled' forging. This valve features primary and secondary valve & vent with heavy duty needle valves, offering 5.4mm (0.23") bores and metal seated valves.

This all forged manifold comprises three heavy duty needle valves. Offering 5.4mm (0.23") bores and metal seated valves.

Valves have three heavy duty metal seated needle valves with 5.4mm (0.23") bores.


CARBON STEEL

Standard specification – ASTM A350 LF2 body material with BS970 316 S11/S31 barstock stainless steel trims and head units with Graphite seals and gland packings. Needle valves have non-rotating hard tip giving metal to metal closure and screw down tee bar operators.


DUPLEX STAINLESS STEEL

Standard specification – ASTM A182 F51 body material with UNS S31803 barstock steel trims and head units with Graphite seals and gland packings. Needle valves have non-rotating hard tip giving metal to metal closures and screw down tee bar operators.

reliability
under
pressure

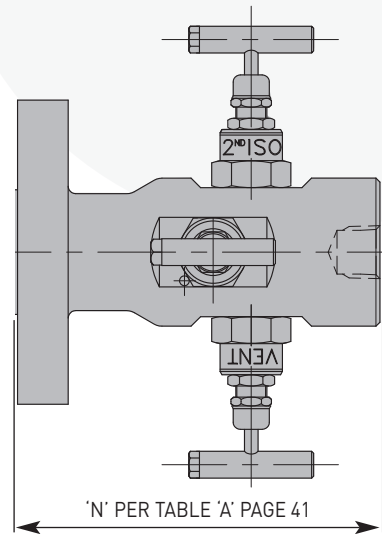

FLANGE TO PIPE – ONE BORE – THREE STANDARD MATERIALS

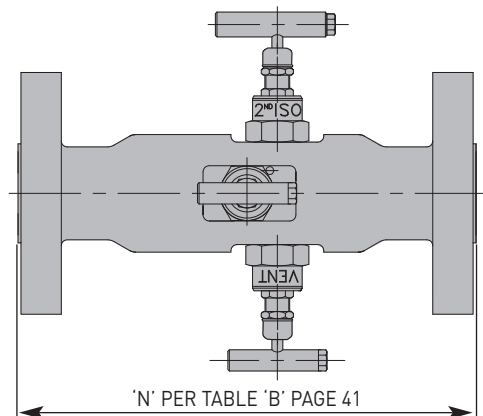

FLANGE TO FLANGE – ONE BORE – THREE STANDARD MATERIALS

STAINLESS STEEL

Standard specification – ASTM A182 F316 body material with BS970 316S11/S31 barstock stainless steel trims and head units with Graphite seals and gland packings. Needle valves have non-rotating hard tip giving metal to metal closure and screw down tee bar operators.

STANDARD	
NACE:	Conformance to NACE MR-01-75 (latest revision).
FIRESAFE:	Firesafe construction.



DOUBLE BLOCK & BLEED DIMENSION TABLES

FLANGE TO PIPE (TABLE A)

BORE			7/32"	5.5mm		3/8"	10mm		9/16"	14mm		13/16"	20mm	
SIZE	FLANGE CLASS	RF/RTJ FLANGE TYPE	N inch	mm	kg	D & F inch	mm	kg	D & F inch	mm	kg	D inch	mm	kg
1/2"	150	Y/N	5.88	149	3.4	6.69	170	3.4	—	—	—	—	—	—
	300	Y/Y	5.88	149	4	6.69	170	4	—	—	—	—	—	—
	600	Y/Y	5.88	149	4	6.69	170	4	—	—	—	—	—	—
	1500	Y/Y	6.25	159	5.2	7.06	179	5.2	—	—	—	—	—	—
	2500	Y/Y	6.5	165	6.4	7.31	186	6.4	—	—	—	—	—	—
3/4"	150	Y/N	5.88	149	4.2	6.69	170	4.2	8.19	208	7.2	—	—	—
	300	Y/Y	5.88	149	4.7	6.69	170	4.7	8.19	208	7.7	—	—	—
	600	Y/Y	5.88	149	4.7	6.69	170	4.7	8.19	208	7.7	—	—	—
	1500	Y/Y	6.25	159	5.6	7.06	179	5.6	8.56	218	8.6	—	—	—
	2500	Y/Y	6.5	165	6.7	7.31	186	6.7	8.81	224	9.7	—	—	—
1"	150	Y/Y	5.88	149	4.4	6.69	170	4.4	8.19	208	7.4	9.25	235	8.2
	300	Y/Y	5.88	149	4.8	6.69	170	4.8	8.19	208	7.8	9.25	235	8.6
	600	Y/Y	6.25	159	5.3	7.06	179	5.3	8.56	218	8.3	9.62	244	9.1
	1500	Y/Y	6.5	165	7.3	7.31	186	7.3	8.81	224	10.3	9.88	251	11.1
	2500	Y/Y	6.5	165	10.1	7.31	186	10.1	8.94	227	13.1	9.88	251	14.1
1 1/2"	150	Y/Y	5.88	149	5	6.69	170	5	8.19	208	8	9.25	235	8.8
	300	Y/Y	6.25	159	7.4	7.06	179	7.4	8.56	218	10.4	9.62	244	11.2
	600	Y/Y	6.25	159	7.4	7.06	179	7.4	8.56	218	10.4	9.62	244	11.2
	1500	Y/Y	6.5	165	9.1	7.31	186	9.1	8.81	224	12.1	9.88	251	12.9
	2500	Y/Y	7.06	179	13.5	7.87	200	13.5	9.38	238	16.5	10.43	265	17.3
2"	150	Y/Y	6.25	159	7.2	7.06	179	7.2	8.56	218	10.2	9.62	244	11
	300	Y/Y	6.25	159	7.4	7.06	179	7.4	8.56	218	10.4	9.62	244	11.2
	600	Y/Y	6.5	165	7.7	7.31	186	7.7	8.81	224	10.7	9.88	251	11.5
	1500	Y/Y	7.06	179	14.5	7.87	200	14.5	9.38	238	17.5	10.43	265	18.3
	2500	Y/Y	7.38	187	20	8.19	208	20	9.68	246	22.1	10.75	273	22.9

— not available

FLANGE TO FLANGE (TABLE B)

BORE			3/8"	10mm		9/16"	14mm		9/16"	14mm		13/16"	20mm	
SIZE	FLANGE CLASS	RF/RTJ FLANGE TYPE	D & F inch	mm	kg	D inch	mm	kg	F inch	mm	kg	D inch	mm	kg
1/2"	150	Y/N	9.25	235	5.4	—	—	—	—	—	—	—	—	—
	300	Y/Y	9.25	235	6.6	—	—	—	—	—	—	—	—	—
	600	Y/Y	9.25	235	6.6	—	—	—	—	—	—	—	—	—
	1500	Y/Y	10	254	9	—	—	—	—	—	—	—	—	—
	2500	Y/Y	10.5	267	11.4	—	—	—	—	—	—	—	—	—
3/4"	150	Y/N	9.25	235	7	9.25	235	9	10.5	267	10	—	—	—
	300	Y/Y	9.25	235	8	9.25	235	10	10.5	267	11	—	—	—
	600	Y/Y	9.25	235	8	9.25	235	10	10.5	267	11	—	—	—
	1500	Y/Y	10	254	9.8	10	254	11.8	10.5	267	12.8	—	—	—
	2500	Y/Y	10.5	267	12	10.5	267	14	11	279	15	—	—	—
1"	150	Y/Y	9.25	235	7.4	9.25	235	9.4	10.5	267	10.4	9.25	235	9.4
	300	Y/Y	9.25	235	8.2	9.25	235	10.2	10.5	267	11.2	9.25	235	10.2
	600	Y/Y	10	254	9.2	10	254	11.2	10.5	267	12.2	10	254	11.2
	1500	Y/Y	10.5	267	13.2	10.5	267	15.2	11	279	16.2	10.5	267	15.2
	2500	Y/Y	10.5	267	18.8	10.75	273	20.8	11	279	21.8	10.75	273	20.8
1 1/2"	150	Y/Y	9.25	235	8.6	9.25	235	10.6	10.5	267	11.6	9.25	235	10.6
	300	Y/Y	10	254	13.4	10	254	15.4	10.75	273	16.4	10	254	15.4
	600	Y/Y	10	254	13.4	10	254	15.4	11	279	16.4	10	254	15.4
	1500	Y/Y	10.5	267	16.8	10.5	267	18.8	11	279	19.8	10.5	267	18.8
	2500	Y/Y	12.38	314	25.6	13.13	334	27.6	13.13	334	27.6	13.13	334	27.6
2"	150	Y/Y	10	254	13	10	254	15	10.75	273	16	10	254	15
	300	Y/Y	10	254	13.4	10	254	15.4	10.75	273	16.4	10	254	15.4
	600	Y/Y	10.5	267	14	10.5	267	16	11	279	17	10.5	267	16
	1500	Y/Y	12.38	314	27.6	13.13	334	29.6	13.13	334	29.6	13.13	334	29.6
	2500	Y/Y	13.13	334	38	13.13	334	40	13.13	334	40	13.13	334	40

— not available




BOLTED CONSTRUCTION DOUBLE BLOCK & BLEED


reliability
under
pressure

- Increased speed of delivery.
- Proven manufacturing performance.
- Flexible choice of end connectors at a significantly reduced lead time.
- Designed to ASME VIII & ANSI B16.34.
- Complements the existing one piece range.
- NACE & firesafe to API 607 REV 4 and BS 6755 Part 2 as standard.
- From 1/2" class 150 through to 2" 2500.
- Materials from carbon steel, stainless steel to more exotic alloys.


FLANGE TO PIPE

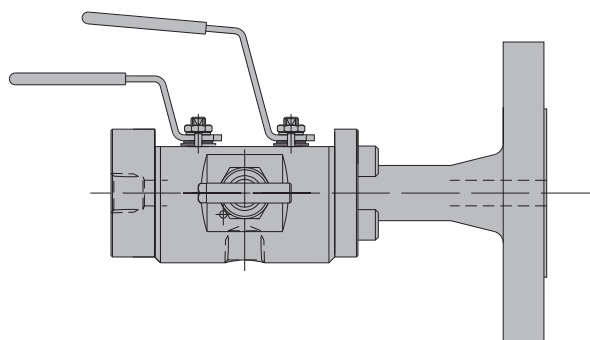

FLANGE TO FLANGE

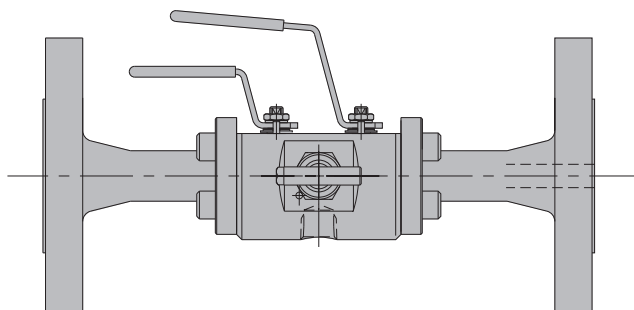

FLANGE x FLANGE x FLANGE


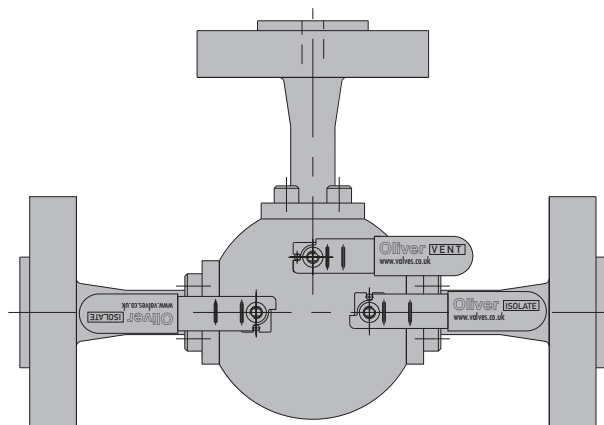


L TYPE



Barstock body with three balls arranged for sampling, chemical injection and double block and bleed of instrument. Surface mounting option available.

Note: 10, 14, 20mm Bore's available.

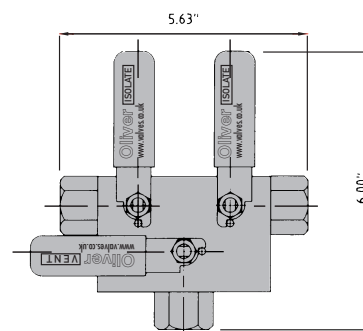



2.0kg

T TYPE



Barstock body with central 'T' ported ball valve for compact double block and bleed, sampling or chemical injection. Surface mounting and Cam Interlock options available.

Note: 10, 14mm Bore's available.



1.6kg



ID TYPE



Barstock body with ball pattern isolate and secondary isolate valve and needle pattern vent.

Note: 10, 14, 20mm Bore's available.

Bottom vent is standard, side vent available as an option.

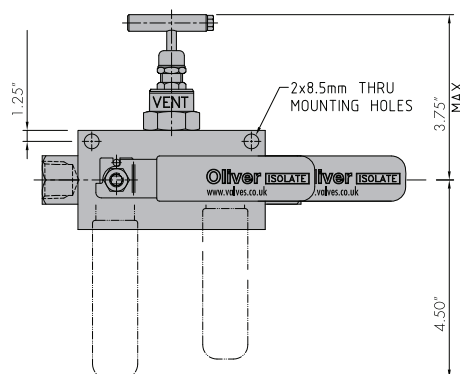



2.0kg

IN TYPE



Barstock body with three needle pattern valves arranged for Double Block & Bleed of instrument.

Note: 5.4mm Bore size.

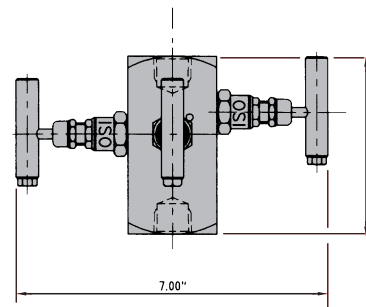

2.5kg




GAUGE BLOCK MONOFLANGE VALVES

reliability
under
pressure




Gauge block monoflange valves work in conjunction with a pre-installed primary isolate valve. They provide very compact instrument Double Block and Bleed valving. This range is also available in a single block and Double Block and Bleed configuration's.

- Block and bleed configuration has multi gauge ports for orientation of valve on horizontal and vertical pipelines.
- Gauge block monoflange valves to be used in conjunction with primary isolate.
- Use standard or heavy duty needle valves, for different pressures.
- Valves designed to connect to ASME B16.5 flanges.
- Block, Block and Bleed, Double Block and Bleed options.
- Weight, space and hook - up time saving.
- Leak paths greatly reduced.

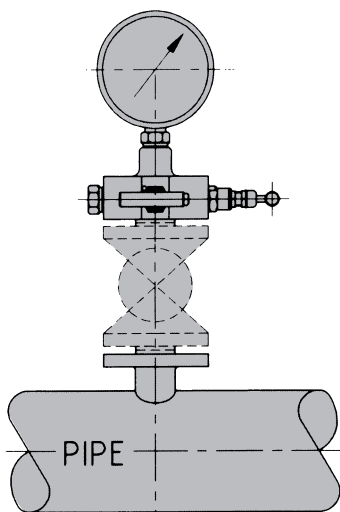

HORIZONTAL PIPING PRESSURE
MEASUREMENT

Modular construction allows easy installation after an existing primary isolate valve. Dual instrument connections enable instrument to be mounted vertically on either horizontal or vertical line mounting application.

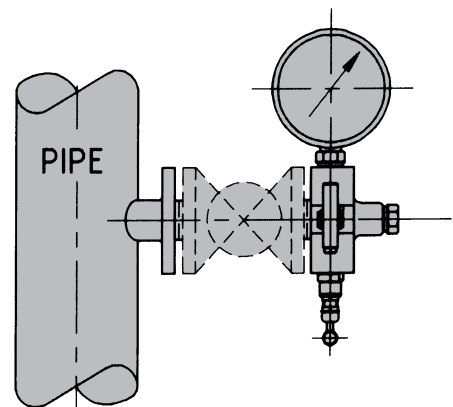

VERTICAL PIPING PRESSURE
MEASUREMENT



reliability
under
pressure




"Slimlines" incorporate a primary isolate piping valve and combine also the instrument Block and Bleed functions. They are designed to replace the traditional primary isolate valve. Our primary isolate valve is of outside screw and yoke construction and is designed to ASME VIII specifications. First isolation outside screw and yoke valves can be supplied to NACE & Firesafe specifications.

This standard configuration of Double Block and Bleed Style Slimline is shown with standard needle valves for bleed and secondary isolation.


Also available as double block and single block.

- Slimline primary isolate valves replace traditional isolate valve and instrument hook-up.
- GOSY primary isolate design to ASME VIII.
- Block and bleed configuration has multi gauge ports for orientation of valve on horizontal and vertical pipelines.
- Use standard or heavy duty needle valves, for different pressures.
- Valves designed to connect to ASME B16.5 flanges.
- Block, Block and Bleed, Double Block and Bleed options.
- Weight, space and hook - up time saving.
- Leak paths greatly reduced.

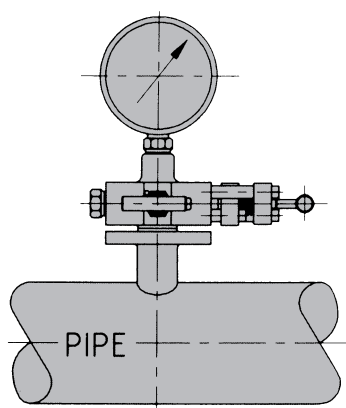

HORIZONTAL PIPING PRESSURE
MEASUREMENT

Slimline can be installed as the primary isolate valve, in either single block, block and bleed or double block and bleed versions. Dual instrument connections enable instrument to be mounted vertically on either horizontal or vertical line mounting application.

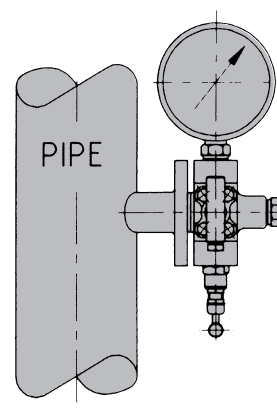


VERTICAL PIPING PRESSURE
MEASUREMENT



ROOT VALVES FOR PRIMARY ISOLATION


This family of valves is designed for welding into a process line. Offered in many configurations with heavy duty needle valves or ball valves.

SINGLE BLOCK (BALL VALVE)

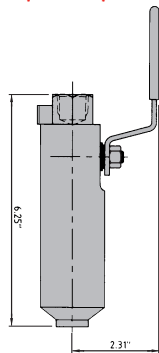

OTHER OPTIONS Heavy duty Needle valve as isolate.


BLOCK AND BLEED (BALL VALVE – ISOLATE) (NEEDLE VALVE – VENT)



OTHER OPTIONS Ball valve as isolate and Ball valve as vent.




PRIMARY GAUGE OUTSIDE SCREW AND YOKE VALVE

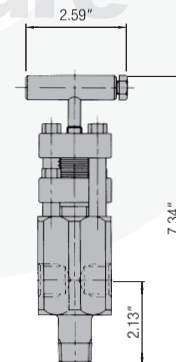

OTHER OPTIONS Available with handle locking.


DOUBLE BLOCK AND BLEED (ALL BALL VALVES)



OTHER OPTIONS Two Ball valves as blocks and one Needle valve as vent. Three Needle valves as blocks and vent.


Major Weaknesses with Traditional Installation

- Cost of installation.
- Overall Size.
- Increased Gland Emission Risk.
- High bending moments hence need for gusset plates.
- Large number of potential leak points within assembly.
- Increased installation time due to complex arrangement.
- On-site welding due to gusset plates.
- Large number of items to stock and to purchase.

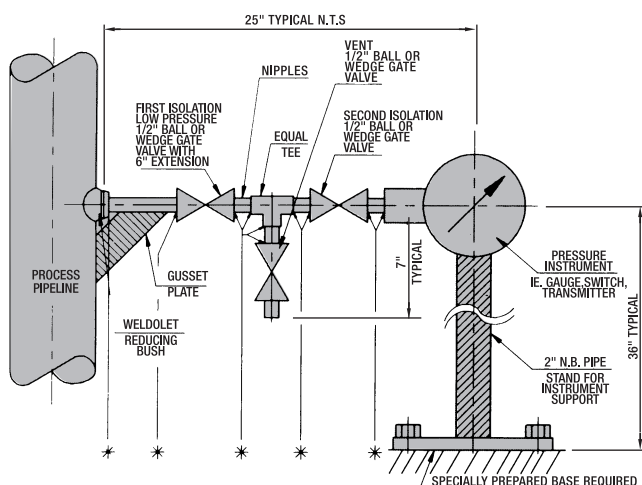

Major Advantages of Oliver Solution


- Safe Hook Up by Elimination of many potential leak points.
- Very cost competitive installation.
- Major space saving.
- Major weight saving.
- Compact/lightweight significantly reduces bending moments and pipework stresses.
- Firesafe to BS 6755 Pt 2, API 607 and API 6FA.
- Simplification of installation – direct labour time savings.
- Wide range of 6000 PSI, Ball, Needle and Check Valve styles.
- Wide range of materials and configurations (including NACE) on fast deliveries.
- One item only to stock.
- Greatly reduced maintenance.

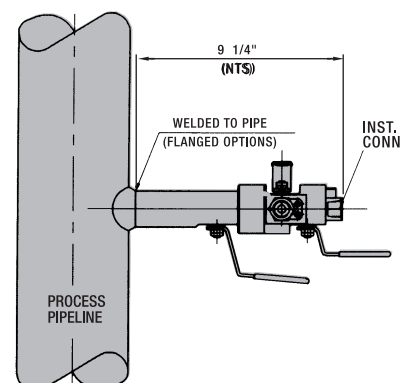

SAMPLING DOUBLE BLOCK & BLEED VALVES

Sampling the process stream can be accomplished with this valve design, where a sample can be taken even at full system pressure directly from the process line. The product allows double isolation from process for safety. The orientation of the sample nozzle is fixed at the assembly stage and can be specified to suit the application.

The flanged body drop forging is machined to ANSI B16.5 flange dimensions with the forged body section incorporating two isolation valves and one bleed valve. A custom designed sampling probe extends from the flange connection into the process media for correct removal of the sample. If projections into the process line cannot be allowed the valve can be supplied without a probe. Sampling valves can be provided with either a single flange connection and screwed connection or double flange connections in the following styles:-


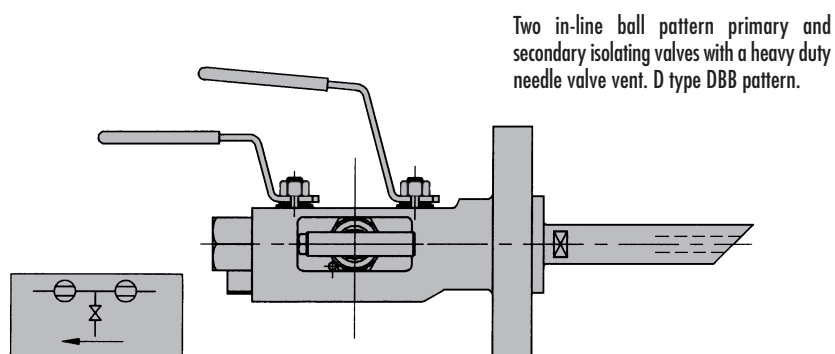


INJECTION DOUBLE BLOCK & BLEED VALVES

Injection of chemicals and other media onto the process stream can be accomplished with this valve design. The valve inlet houses a one way check valve which opens for injection and goes normally closed to eliminate process fluid outflow. The orientation of the injection nozzle is fixed at the assembly stage and can be specified to suit the application.

The flanged body forging is machined to ANSI B16.5 flange dimensions and incorporates two isolating valves and a bleed needle valve. The injection probe extends from the flange connection into the centre of the process stream for the correct positioning of the injection media. Injection valves can be provided with either a single flange connection and screwed connection or double flange connections in the following styles:-

The N Type double block and bleed with injection facility is also available.

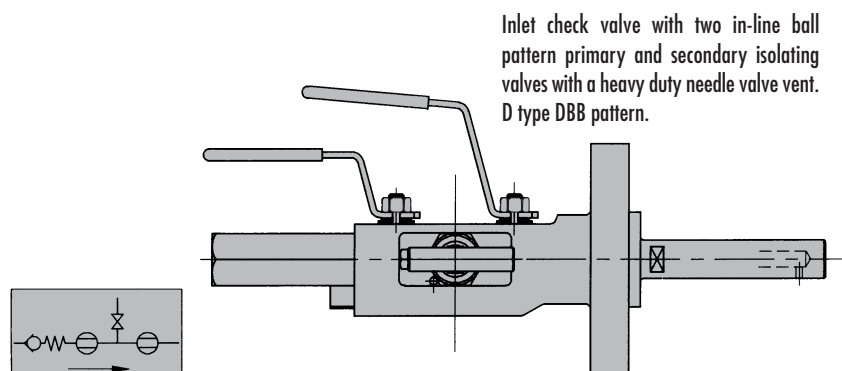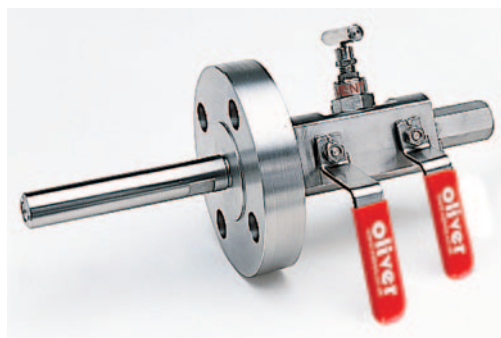

FLANGE SIZE 1 1/2" NB, FLANGE CLASSES 150 TO 2500 RF & RTJ. OPTION, FLANGE SIZE 2" NB, FLANGE CLASSES 150 TO 2500 RF & RTJ. OTHER BALL VALVE BORE SIZES AND FLANGE SIZES CAN BE ACCOMMODATED.

NOTE: INJECTION DOUBLE BLOCK & BLEED WITHOUT CHECK VALVE CAN ALSO BE SUPPLIED AS AN OPTION.

NOZZLE TECHNICAL INFORMATION

PROBE LENGTH:

This length is manufactured to suit customer requirements for the correct positioning of the injection orifice, up to a maximum length of 24". The position of the injection orifice can also be rotated at assembly to suit orientation relative to the valve handles.

PROBE MATERIALS:

The standard material is 316 stainless steel but other materials can be used to suit customer requirements.


INJECTION NOZZLES:

The standard orifice is a 0.125" (3mm) diameter hole but other arrangements can be accommodated including swirl pattern spray nozzles to improve dispersion of the media.


CHECK VALVE:

This poppet type spring return valve has a Viton soft seat, and offers bore sizes of 10mm (CV2.0) or 12mm (CV4.6) or 16mm (CV7.2). Alternatively flange to flange styles of 6mm (CV2.0) max or 10mm (CV2.0) (maximum temperature 120°C) can be furnished. For Methanol injection specify Kalrez 'O' ring material for check valve seat.


SAMPLE NOZZLE

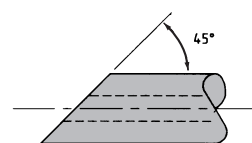

INJECTION NOZZLE



INJECTION SWIRL PATTERN NOZZLE




HOW TO ORDER DOUBLE BLOCK & BLEED VALVES

reliability
under
pressure


MODEL	/TYPE	/MATERIAL	/BORE	/CONNECTIONS	/OPTIONS
EXAMPLE DBB	/D	/S	/X /10-1500 RTJ	/50F /25F	/FS/HL/NA
Model DBB Double block and bleed			Process Instrument Vent		
Type D Integral flange 2 ball in line & needle vent N Integral flange, 3 needle valves F Integral flange, 3 ball in line pattern A Integral flange, 2 balls in line L Barstock, 3 ball oblique pattern T Barstock, 3 ball in line pattern IN Barstock, 3 needle valves ID Barstock, 2 ball in line & needle vent			Ball Bores X = 0.40"(10mm) Y = 0.55"(14mm) Z = 0.80"(20mm)		Options (specify in alphabetical order) HL Handle locking IL Cam interlocking (on T and L types only) IP Injection probe SA Spanner actuation SP Sample probe Standard NA NACE MR-01-75 (latest revision) (EN1A Carbon steel to NACE not available) FS Firesafe to API 607 and API 6FA and BS 6755 Part 2
Material Selection C Carbon steel (barstock) EN1A Carbon steel (forged) ASTM A350LF2 S Stainless steel (barstock) 316SS/BS970-316S11 Stainless steel (forged) ASTM A182 F316 DUP Duplex ASTM A182 F51 UNS S31803 SUP-DUP Super Duplex UNS S32760 M Monel 400 FER Ferralium 255 Other materials available on request			Flange Details Select flange size 50 1/2" 75 3/4" 10 1" 150 1 1/2" 20 2" 30 3" Followed by class 150 150lb 300 300lb 600 600lb 900 900lb 1500 1500lb 2500 2500lb Followed by flange type RTJ Ring type joint RF Spiral finish raised face SRF Smooth spiral finish raised face		Connections Details Connection size 25 1/4" 38 3/8" 50 1/2" Std Process/Instrument (and vent) 75 3/4" 10 1" Process connection NPT STANDARD BP BSP parallel pipe thread BS2779-1986 BT BSP taper pipe thread BS21-1985 BW Butt weld (4" extensions) BI Twin Ferrule, Compression fitting SW Socket weld (4" extensions) Connection type F Female thread (Std instrument/vent) M Male thread
Bolts/Gaskets Flange bolts and gaskets are not provided Patent application No 88 17668					For Actuation Options Consult factory




HOW TO ORDER SLIMLINE / MONO FLANGE VALVES

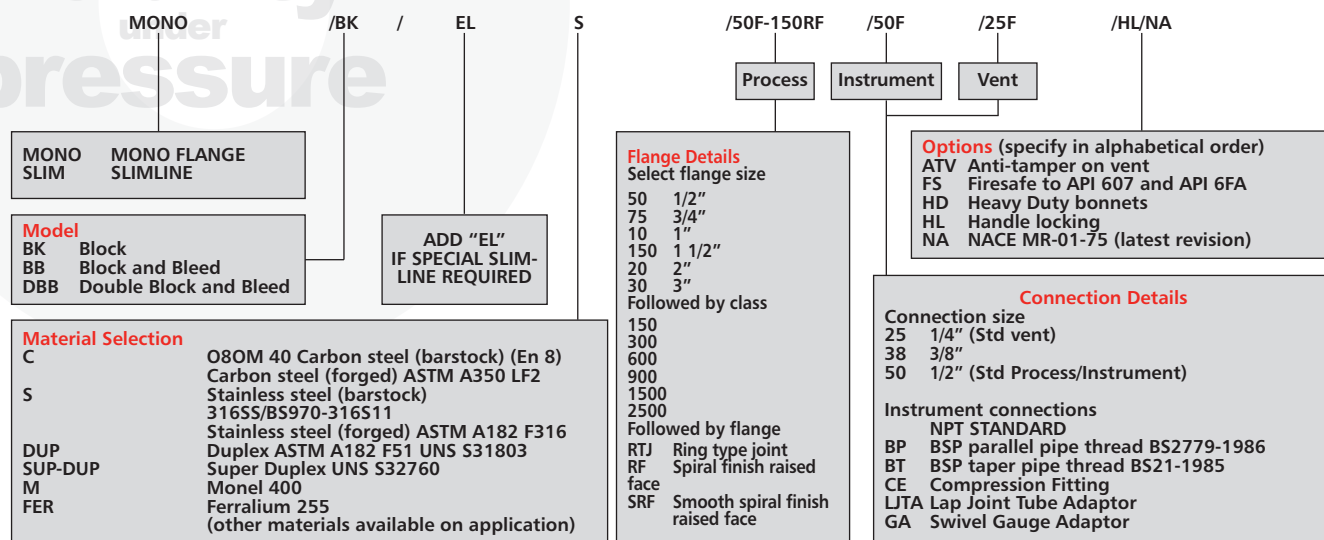

HOW TO ORDER ROOT VALVES

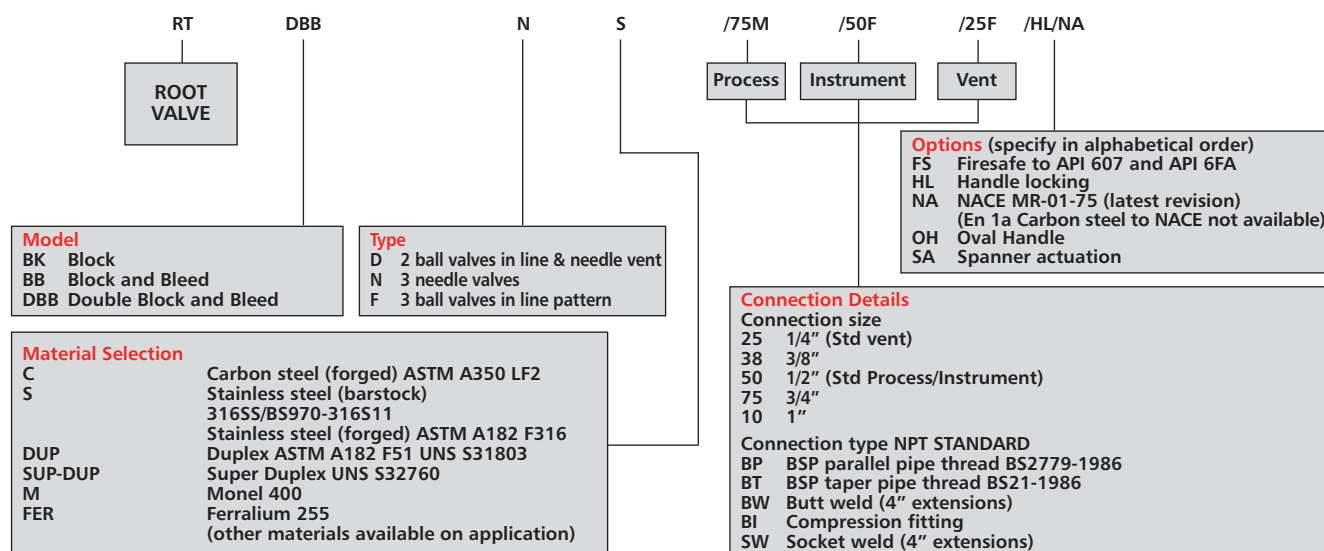

HOW TO ORDER GAUGE OUTSIDE SCREW AND YOKE VALVES

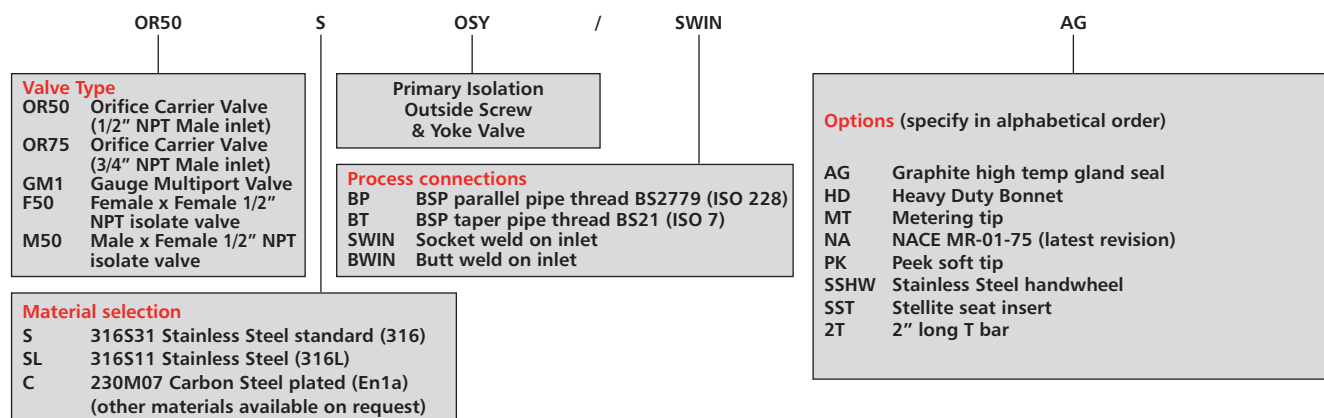

INSTRUMENTATION VALVES INSTALLATION, OPERATION AND SAFETY INSTRUCTIONS

IMPORTANT: BEFORE INSTALLATION THESE INSTRUCTIONS MUST BE READ AND UNDERSTOOD

reliability
under
pressure

SAFETY NOTES:

- i) All adjustments should be carried out by qualified personnel with the valve at zero pressure.
- ii) End connectors must not be removed from bodies.
- iii) Handle wrenches/extensions must not be used to operate the valves.
- iv) Vent plugs must not be removed when the isolate valve is open and under pressure.
- v) Head units and locking pins must not be removed once installed.

- vi) Maximum torque to be applied to tee-bars is 10lb ft.
- vii) Valves must be suitably supported in service.
- viii) Needle Valves: No excessive side forces (>30lb ft) to be applied to the head unit.
- ix) **Ball Valves: No excessive forces to be applied to the handle/handle locking arrangement, and do not carry valve by the handle.**
- x) Do not paint over valve body markings.
- xi) Pressure and Vent plugs are as standard supplied in a bag attached to the valve.

EQUIPMENT REQUIRED

HEAVY DUTY AND STANDARD NEEDLE VALVE
Tee bar bolt – 10mm A/F spanner.
Pusher nut – 9/16" A/F spanner.
Head Unit Cartridge – 22mm socket and torque wrench.

BALL VALVE – SEVERE SERVICE – VALVE – 4mm and 6mm bore
Lock Nut – 3/4" A/F spanner.
No maintenance required.
Ball Valve spanner actuation – 1" A/F spanner.
(See Heavy Duty and Standard Needle Valve.)

SEVERE SERVICE – VALVE – 11mm bore
Tee bar bolt – 13mm A/F spanner.
Pusher nut – 7/8" A/F spanner.
Head Unit Cartridge 13/8" socket and torque wrench.
Lock nut – 1.1" A/F spanner.

OUTSIDE SCREW AND YOKE VALVE – GAUGE SNUBBER – 1/4" VENT PLUG, PRESSURE PLUG – 1/2" VENT PLUG – PRESSURE PLUG,
Tee bar bolt – 1/2" A/F spanner.
Packing bolt – 1/2" A/F spanner.
Lock nut – 8mm A/F spanner.
9/16" A/F spanner.
22mm A/F spanner.

OPERATING INSTRUCTIONS

STANDARD NEEDLE VALVES – Approximately 6 Turns from open to closed, clockwise to close.

HEAVY DUTY NEEDLE VALVE – 4 1/2 Turns from open to closed, clockwise to close.

SEVERE SERVICE VALVE (4mm and 6mm bore) – 4 1/2 Turns from open to closed, clockwise to close.

SEVERE SERVICE VALVE (11mm bore) – 5 Turns from open to closed, clockwise to close.

OUTSIDE SCREW AND YOKE VALVES – Approximately 6 Turns from open to closed, clockwise to close.

BALL VALVES – 1/4 Turn from open to closed, clockwise to close as standard (ie Valve is closed when handle is at 90° to the valve body).

NOTE – Apart from Ball Valves, the packing on these valves is adjustable, so turns between open and closed will vary slightly from valve to valve.

All valve bodies show our company name, maximum cold working pressure, valve material, the valve part number and also a trace code number which relates to the material certificates for that particular valve.

INSTALLATION AND MAINTENANCE INSTRUCTIONS

NEEDLE VALVES – If needle valve has socket weld, stub weld or butt weld connections the needle valve will be supplied in kit form. (This means the valve head unit is supplied separately to the valve body) then after welding the valve body into the pipeline –

1. Ensure that the spindle is fully retracted into the head unit so the tip is hardly showing.
2. Place PTFE ring into the undercut at the top of the 3/4" UNF thread.
3. If head unit is stainless steel, please ensure that a PTFE spray is applied to the 3/4" UNF thread PRIOR to engaging it with the body.
4. Screw head unit down and Torque to:-

CARBON STEEL	95lb ft
STAINLESS STEEL	180lb ft

5. Replace locking pin in either one of the 4mm holes and secure.

6. Replace Tee bar and tighten down Tee bar bolt. Max torque to operate Tee bar 2lb ft.

7. **Adjust packing if required by loosening lock nut (bottom nut on head unit). Close the valve by turning the tee bar in a clockwise direction until it stops. Open the valve one full turn (turn tee bar anti-clockwise). Tighten down the pusher (top nut on head unit) which compresses packing until the valve feels not too slack or difficult to operate, then tighten down lock nut.**

8. If valve packing Graphite wait two minutes after tightening the pusher and before checking valve operation.

IMPORTANT NOTE – If socket weld, butt weld, stub weld connections are required for Ball valve, Miniature and Outside Screw and Yoke valves then valves will include 3" extensions, so the valve can be welded into the line without destroying the seats and packing and without having to dismantle or re-build the valve.

BALL VALVE – No maintenance required. End connections must not be removed from bodies.

OUTSIDE SCREW AND YOKE VALVE – SAFETY NOTE: These operations must be carried out at zero pressure and ambient temperature.

1. To adjust PTFE packing close the valve by turning the tee bar in a clockwise direction until it stops. Do not exceed 10lb ft torque. Open the valve one full turn (turn tee bar anti-clockwise). The two packing nuts either side of the spindle must be adjusted evenly to keep the gland bridge square and compress the gland packing until the valve feels not too slack or difficult to operate.

2. If valve packing is Graphite, wait for two minutes after tightening the two nuts before checking valve operation.

Carry out operation 1 again if required.

WARNING: Bonnets and yokes must not be removed from bodies.

GAUGE SYPHONS AND CHECK VALVES – No maintenance required.

GAUGE SNUBBERS – **SAFETY NOTE:** This operation must be carried out at zero pressure and ambient temperature.

The variable orifice is adjusted by slackening off the lock nut, adjusting the screw and then retightening the nut.

SOUR GAS SERVICE

Valves can be manufactured for Sour Gas Service in accordance with NACE MR-01-75 latest revision.

OXYGEN SERVICE

Oliver Valves has in-house facilities to degrease valves and remove all dirt and hydrocarbons making valves suitable for oxygen service applications. Oliver Valves DO NOT offer the following valves for oxygen service:-

All carbon steel valves, Ball Valves, Valves with soft seats, Needle Valves with handwheel locking.

VACUUM SERVICE

Oliver Valves can supply Needle (soft and hard tip) and Ball Valves for Vacuum Service. Both have been successfully tested to a .01m bar absolute vacuum.



DOUBLE BLOCK & BLEED VALVES INSTALLATION, OPERATION AND SAFETY INSTRUCTIONS

IMPORTANT: BEFORE INSTALLATION THESE INSTRUCTIONS MUST BE READ AND UNDERSTOOD

Storage

If the valves are not required for immediate use then they should be stored in their original packaging and end protectors should not be disturbed. Storage should be off the ground in a clean, dry indoor area. If storage period exceeds 12 months then items should be inspected by Oliver Valve personnel prior to installation. **Ball valves should be stored in the 'full open' position. All ball valves must be operated (fully cycled) every 2 months whilst in storage.**

Warning Notice:

For Safety reasons it is important that the following precautions are taken before starting work on the valve.

1. That personnel instructed to carry out any necessary work are familiar with this type of valve and have read and understood the information provided in this instruction.
2. That the materials of construction of the valve and pressure/temperature limits shown on the valve nameplate are suitable for the process fluid and conditions.
3. Personnel should use suitable protective equipment and clothing that is appropriate for the area in which the valve is to be installed.
4. That the line is depressurised, drained and vented before installing/removing the valve.
5. Flange covers or end protectors should be removed before installation and the valve inspected internally to ensure that it is free from foreign matter.
6. Pressure and Vent plugs are as standard supplied in a bag attached to the valve.

Installation

1. Single Block, Block & Bleed, Double Block and Double Block & Bleed ball valve internals are bi-directional; the body configuration usually determines the orientation of the valve. If the valve is fitted with an injection quill or sample probe please ensure that it is fitted correctly in relation to the direction of the pipeline flow.
2. For Needle Valves, ensure that the flow arrow on the valve body is pointing in the direction of the flow.
3. Do not carry or lift valves by the handle.
4. For flanged joints ensure that mating flanges and gaskets are clean and undamaged.
5. Ensure that mating flanges are aligned correctly; bolting should be inserted through the bolt-holes without interference. Bolting should be tightened evenly in a diagonal pattern.
6. For pipe threads requiring a pressure tight joint first ensure that the mating threads are clean and free from damage. Add a suitable sealant to the threads and wrench-tighten. On certain materials such as stainless steels the sealant should contain a lubricant to prevent galling.
7. To prevent body distortion and leakage ensure that the pipe-work is correctly supported and no undue stress is placed on the body.
8. Prior to operating the valve ensure that there is no possibility of abrasive particles such as weld slag or sand within the piping system. The system needs to be thoroughly flushed clean prior to operation.
9. It is the user's responsibility to ensure that Injection and Sampling operations are carried out using appropriate safeguards to minimise all risks associated with pressure and the media concerned.

Operation

1. All valves are hand operated and are clockwise to close as standard
2. Ball Valves are 1/4 turn (90°) from Open to Close with the exception of the Vent feature shown in **Figure 1**
3. With the exception of the Vent feature shown in **Figures 1 & 2** when the Ball Valve lever is parallel to the Valve centre line (C/L) the valve is open
4. With the exception of the Vent feature shown in **Figures 1 & 2** when the Ball Valve lever is perpendicular to the Valve centre line (C/L) the valve is closed Ball Valves are intended for On-Off duty and should not be used for regulating flow. Please ensure that valve is either in the fully open or fully closed positions.
The maximum operating torque for the ball valve shall not exceed the following
10mm bore = 13.5 N.m (10 lbf.ft)
14mm bore = 20 N.m (15 lbf.ft)
20mm bore = 20 N.m (15 lbf.ft)
6. Standard Duty needle valves are approximately 5 to 6 turns from fully open to fully closed. Heavy Duty needle valves are approximately 3 to 4 turns from fully open to fully closed. The maximum operating torque for the needle valve shall not exceed 8 N.m (6 lbf.ft) When back seating the valve, in the fully open position, the maximum torque applied shall be less than 6.7 N.m (5lbf.ft).
7. Do not use excessive force to operate the valve, if the valve is difficult to operate consult factory.
The Vent feature on Valves with a Bleed option can be used for the following:
a) In closed coupled systems such as instrument isolation it can be used to vent pressure to enable maintenance or inspection of instrumentation to be undertaken.
b) To determine if seat leakage is present between 1st & 2nd isolates
Note: Due to the small size of the vent orifice it is not recommended that valves with this feature are used to depressurise long pipe runs.
To vent a close-coupled system proceed as follows:
1. Close 1st Isolation Valve see **Figures 1 & 2**. If checking for seat leakage close 2nd Isolate also.
2. If a pressure plug is fitted ensure the Vent valve is in the closed position before unscrewing the pressure plug slowly to release any trapped pressure.
Note: If the process fluid is hazardous then it should be vented to a safe location
3. Open Vent valve slowly, standing clear of the vent port while venting is in progress.
4. When venting is complete close Vent Valve & 2nd Isolate.
5. Refit Pressure Plug if supplied.
6. Valve can be returned to normal operating position when it is safe to do so.

Figure 1
'F' type with in-line vent

90° Open to Closed.
Ball shown in closed position. In this position handle is at a right angle to the valve C/L.

180° Open (Venting) to Closed.
Ball shown in venting position. In this position direction arrow is pointing towards vent port.


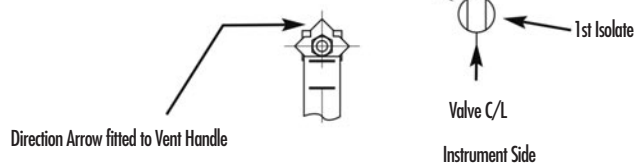


Figure 2
'F' type with offset vent

90° Open to Closed. Ball shown in closed position. In this position handle is at a right angle to valve C/L.

90° Open (Venting) to Closed. Ball shown in closed position. In this position direction arrow is at a right angle to the vent port.

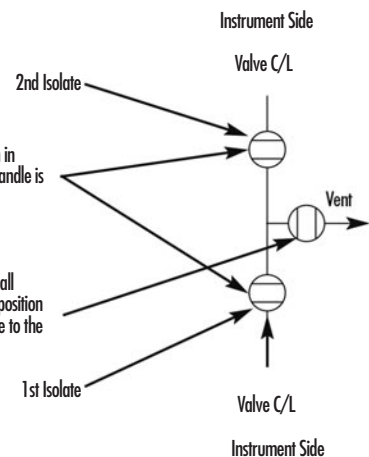

Maintenance

- Other than periodic inspection to ensure satisfactory operation & sealing no routine maintenance is necessary.
- On Needle Valves any gland leakage should be addressed by first de-pressurising the system. Then the Valve can be adjusted. Fully close the valve then open the valve two full turns. Loosen the lock nut by turning it anti-clockwise. The pusher can then be adjusted by turning it in a clockwise direction. The spindle should be tight but smooth to operate. Once the valve has been adjusted on the leak has stopped the lock nut can be re-tightened.
- If no further adjustment is possible or seat leakage is suspected then the valve will require a complete overhaul and should be returned to Oliver Valves Ltd.
- Head Units & End Connectors are fitted with anti-tamper pins to prevent unauthorised removal. Under no circumstances should these pins be removed without the prior written consent of Oliver Valves Ltd.
- No attempt to remove or dismantle the Valve should be undertaken without first ensuring that the line is depressurised, drained and vented.

Inspection

- Valves should be at zero pressure and ambient temperature prior to any inspection.
- Maintenance Engineers & Operators are reminded to use correct tools and equipment.
- A full risk assessment and methodology statement must be compiled prior to any maintenance work.
- The risk assessment must consider the possibility of the allowable limits being exceeded resulting in a potential hazard.
- Maintenance programme should include checks on the development of unforeseen conditions which could lead to failure.
- In systems where corrosion could be a potential hazard checks on the body and body seals should be made. If corrosion or leakage is present then the valve should be replaced.





quality

Registered to ISO 9001, The Oliver Valve companies are able to offer complete component traceability across a wide range of instrumentation, pipeline valves and accessories. Comprehensive in-house facilities satisfy both production and special testing requirements including:

- Hydrostatic testing
- Nitrogen gas testing
- Fugitive emission testing
- Cryogenic testing
- High temperature testing
- Helium leak detection
- L.P.I. & M.P.I. NDT methods
- Fire testing BS6755 Pt2, API607/4
- Oxygen clean facilities
- Low pressure testing
- Blasting and painting facilities

Oliver Valves Research & Development and Training Centre



Oliver Valves Limited Parkgate Industrial Estate
Knutsford Cheshire WA16 8DX England
T +44 (0)1565 632 636 F +44 (0)1565 654 089
E sales@valves.co.uk www.valves.co.uk



www.valves.co.uk

Continuous development in Oliver Valves products may necessitate changes in the details contained in this brochure
Oliver Valves Ltd reserve the right to effect such changes at their discretion without prior notice.

CAT OV Rev 9-23